




Offered by  
**LASER LAB SOURCE**

manufactured by **AeroDIODE**

## 940nm 150W Laser Diode Module 150W Fiber-Coupled Module

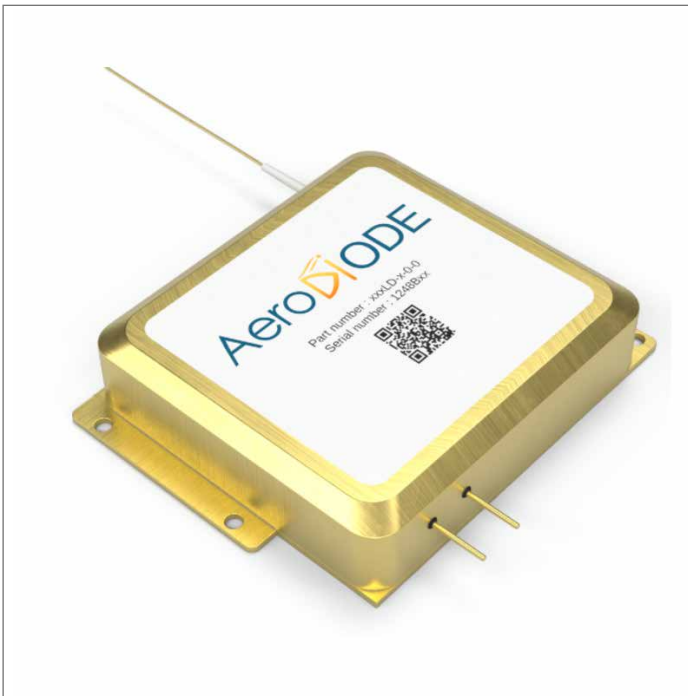

### **940LD-5-0-0 / LASER-DIODE**

- o CW Output Power 150 W
- o Line Width 6 nm
- o 105 $\mu$ m Multi-Mode Fiber, SMA905 Connector



**LASER  
DIODE  
SOURCES**



## 940NM 150 WATT LASER DIODE

These 940nm lasers offer up to 150 watts of optical output in both pulsed and CW modes of operation. They are coupled to 105 $\mu$ m fiber with a NA of 0.22. These multimode devices are commonly used as pump / excitation sources for fiber laser applications.

## 940LD-5-0-0 / LASER-DIODE SPECIFICATIONS

### Optical Specifications

Wavelength: 940nm ( $\pm$  5nm)  
CW Output Power: 150 Watts  
Spectral Width (FWHM): 6 nm (typ)  
Wavelength shift w Temperature: 0.3 nm/ $^{\circ}$ C  
Wavelength shift w Current: 0.8 nm/A  
Back Reflection Isolation Stage: 1020 - 1200 nm  
Back Reflection Isolation: 30 dB

### Electrical Specifications

Threshold Current: 0.8 A  
Operating Current: 13.5 A \*  
Operating Voltage: 12.5 V  
Slope Efficiency: 12.5 W / A  
Conversion Efficiency: 50%  
\* For operating currents above 6 Amps, the electrical connections must be soldered.

### Fiber and Package Specifications

Fiber Core: 105  $\mu$ m, NA 0.22  
Clad Diameter: 125  $\mu$ m  
Buffer / Tube Diameter: 900  $\mu$ m  
Min Bend Radius: 37.5 mm  
Connector: SMA 905  
Dimensions: 80 mm x 80 mm x 25 mm  
Mounting Hole Dimensions: 3.3mm dia / 74.4 mm x 38 mm  
Storage Temperature: -30 $^{\circ}$ C to 70 $^{\circ}$ C  
Operating Temperature: 15 $^{\circ}$ C to 45 $^{\circ}$ C  
Soldering Temperature: 260 $^{\circ}$ C (max)  
Soldering Time: 10 sec (max)



Offered by  
**LASER LAB SOURCE**



**LASER  
DIODE  
SOURCES**

## **PRODUCT SALES AND SERVICE:**

Unlimited phone and email support is provided for products purchased through Laser Lab Source. Orders for this product are fulfilled by Laser Lab Source in North America and select international regions. It is manufactured by AeroDIODE, Talence, France.

## **PRODUCT WARRANTY:**

This product is sold with a full one-year warranty. It is warranted to be free from defects in material and/or workmanship for a period of one year from the date of shipment.



Laser Lab Source, a division of Research Lab Source, Inc.  
670 S. Ferguson St., Suite 3  
Bozeman, MT 59718 USA

Phone: 406-219-1472

[www.LaserLabSource.com](http://www.LaserLabSource.com)

**AeroDIODE**

Rue François Mitterrand Institut d'Optique d'Aquitaine  
33400 Talence  
FRANCE