



*This product is sold
and supported by*



LASER LAB SOURCE
marketplace for **Scientists & Engineers**

Sold and supported by:
LaserDiodeSource.com
a division of Laser Lab Source
contact@laserlabsource.com
800-887-5065

Manufactured by:
LD4B
www.d4b.com

LDS-1064-FP-20 | 1064nm Laser Diode; 20mW CW Output Power



1064nm, 20mW, Coaxial Single-Mode Fiber-Coupled Laser Diode

- ◇ Hermetically-Sealed Coaxial Package in Heat Sink / Mounting Bracket
- ◇ Fabry-Perot Laser with Internal Photodiode
- ◇ Single-Mode Fiber Coupled
- ◇ FC/APC Connector
- ◇ Available with Other Fiber, Connector, and Package Options

Advanced Performance Semiconductor Lasers and Control Instruments

LDS-1064-FP-20

OVERVIEW

LDS-1064-FP-20 is the laser diode coupled to an optical fiber and packaged into a hermetic case

MAIN FEATURES

- Wavelength: 1064 nm
- Cavity type: Fabry-Perot
- Optical power: up to 20 mW in CW mode in single-mode fiber Corning Hi-1060
- Package types: coaxial with bracket, 14 pin DIL
- Built-in monitor photodiode

APPLICATIONS

- Laser systems

Standard Part Number: [LDS-1064-FP-20-B-3-SM06-FA-CW-1.0](#)
 (Other Configurations Available On Request)

LDS-1064-FP-20-X-3-X-X-X-X

Case type

B: compact coaxial with double-sided bracket
T: 14 pins DIL with thermal stabilization (TEC and thermistor)
E: 14 pins DIL with thermal stabilization (TEC and thermistor)
 Other type on request

Fiber type

SM06: SM, [Corning HI 1060](#), furcation tubing Ø0.9 mm
SMP06: PM, [Fujikura SM98](#), PANDA type, furcation tubing Ø0.9 mm
SM1: G.657.A1, [Corning SMF-28 Ultra](#), furcation tubing Ø0.9 mm
SM3: G.657.B3, [Corning ClearCurve ZBL](#), furcation tubing Ø0.9 mm
MM5: MM, [50/125_OM2](#), furcation tubing Ø0.9 mm
MM6: MM, [62.5/125_OM1](#), furcation tubing Ø0.9 mm
 Other type on request

Connector type

FU: FC/UPC (SM06, SMP06, SM1, SM3, MM5, MM6)
FA: FC/APC (SM06, SMP06, SM1, SM3)
N: no connector
 Other type: on request

Test measurements

CW: CW mode (electro-optical parameters at T=25+/-5 C and spectrum)
P: pulse mode
CWP: both CW and pulse mode

Fiber length


0.5: 500+/-50 mm
1.0: 1000+/-100 mm
 Other length on request

LDS-1064-FP-20

ABSOLUTE MAXIMUM RATINGS

Parameter		Value	Unit	Conditions
Laser diode forward current*	I_{max}	120	mA	CW, T = 25°C
Laser diode reverse voltage	V_{RL}	2	V	
Photodiode reverse voltage	V_{RP}	30	V	
Operating temperature**	T_{OP}	-10 - +70	°C	Package B
Operating temperature**	T_{OP}	-40 - +60	°C	Package T, E (Tst = 25°C)
Storage temperature	T_{stg}	-40 - +85	°C	
Soldering temperature	T_{sold}	260	°C	Max. 5 seconds

*Maximal laser diode forward current depends on the operating temperature. Please, refer to the figure below.

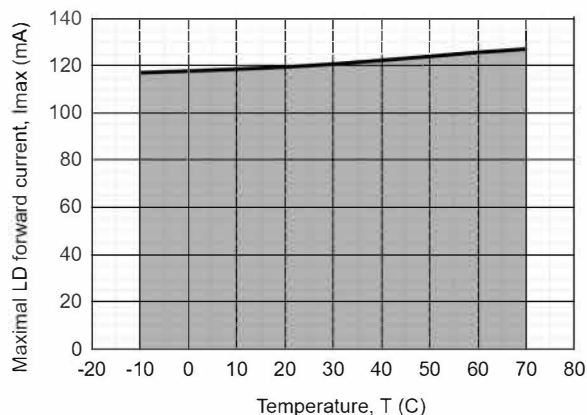

**Operating temperature is defined by the case temperature. It is recommended to ensure sufficient heat dissipation so that the module's maximum operating temperature is not exceeded.

Operating temperature for the DIL-14-pins case (T or E) with TEC is defined for internal temperature stabilization at $T_{st} = 25^\circ\text{C}$ that corresponds to thermistor resistance $R_t = 10\text{ k}\Omega$.

LDS-1064-FP-20

ELECTRICAL-OPTICAL CHARACTERISTICS (T = 25 °C)






Parameter		MIN	TYP	MAX	Unit	Conditions
Optical power (CW)	P_{cw}	20			mW	CW, $I_{op} = 120$ mA, SM06
Mean wavelength	λ	1050	1060	1070	nm	CW, $I_{op} = 120$ mA
Spectral width	$\Delta\lambda$		1	3	nm	CW, $I_{op} = 120$ mA
Wavelength-temperature coefficient	$d\lambda/dT$		0.34		nm/°C	CW, $I_{op} = 120$ mA
Threshold current	I_{th}		15	20	mA	
Slope efficiency	S_e	0.18	0.21		mW/mA	CW, SM06
Operating voltage	V_{op}		1.9	2.1	V	CW, $I_{op} = 120$ mA
Monitor current	I_m	0.05	0.15	0.50	mA	CW, $I_{op} = 120$ mA, $V_r = 5$ V
Polarization extinction ratio	PER	17			dB	CW, SMP06
Front-to-rear tracking error	E_r		0.2	0.8	dB	CW, $P_{cw} = 3$ mW, SM06, $T = -10 \sim +50$ °C

Tracking error $E_r = \max |10 \lg [P(T)/P(25^\circ\text{C})]|$, $I_m = \text{const}$, $T = T_{\min} \sim T_{\max}$

Pulse mode: pulse width 10 μs , duty cycle = 1%

LASER DIODE

LDS-1064-FP-20

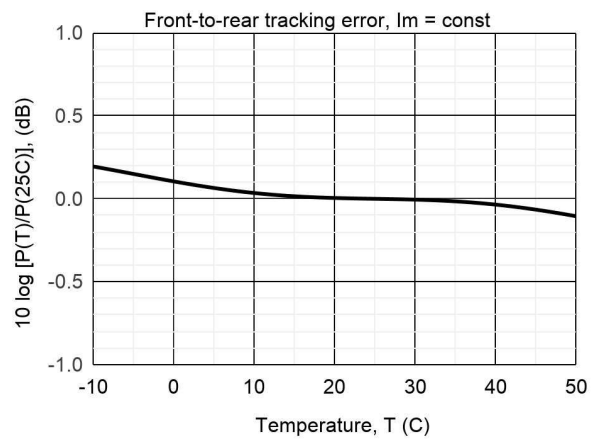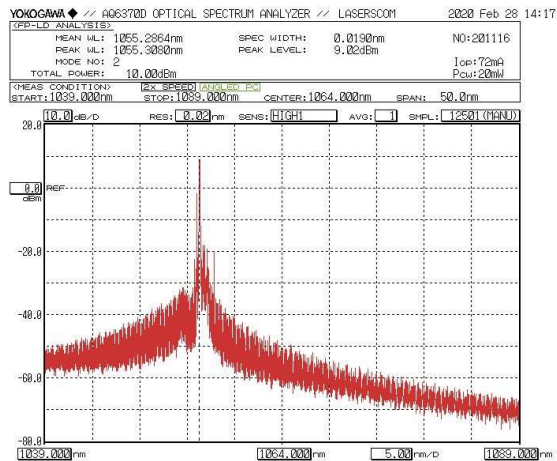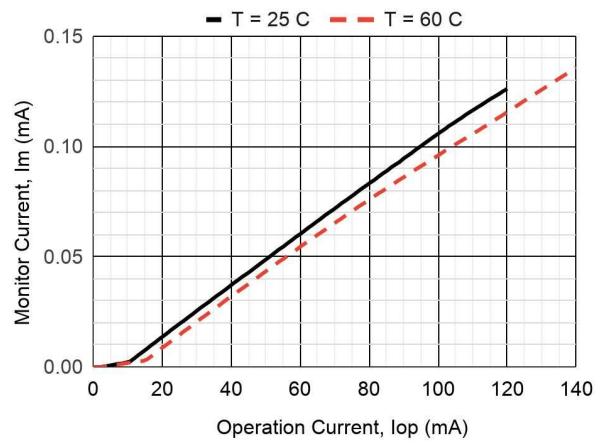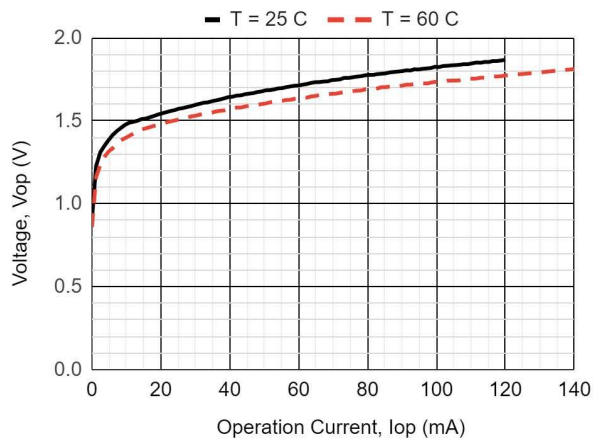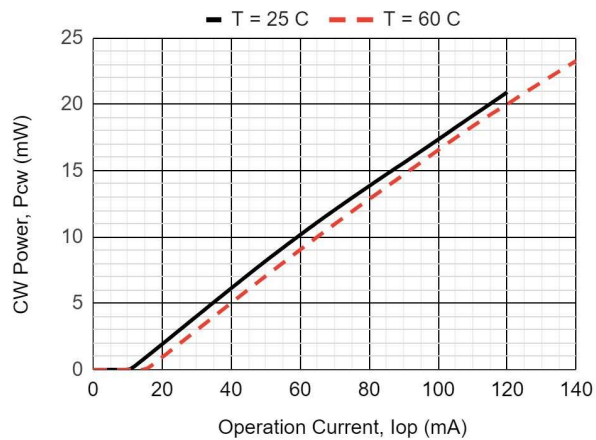

LDS-1064-FP-20

Characteristics, data, materials and structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.

Safety and handling cautions

1. Avoid smashing and burning of the module. Avoid storing and using the module in conditions where water, organic solvents or aggressive acids or bases may contact the module or where there is a possibility of exposure to corrosive gases, explosive gases, dust, salinity or other harsh conditions. The module should be disposed as special industrial waste.
2. Exceeding absolute maximum ratings even for a short time can cause permanent damage of the module.
3. The module is sensitive to and can be broken by ESD (static electricity).

Conflict Minerals Policy Statement

LasersCom LLC achieves business objectives and customer needs with social responsibility. We do not support or contribute to the violence and human rights violations associated with the mining of conflict minerals coming from Conflict Regions according to US "Dodd-Frank Act". When possible, our suppliers' conflict mineral statements are reviewed. We do not directly purchase Conflict Minerals from any source and do not knowingly procure any parts and products containing Conflict Minerals from Conflict Regions.

RoHS Compliance Statement

Restriction of Hazardous Substances (RoHS) directive (Directive 2011/65/EC amended with Directive (EU) 2015/863) is the directive aimed at reducing the harmful environmental impact of waste electrical equipment by restricting the use of known dangerous substances. Based on information received from our supply sources, LasersCom LLC hereby states that the banned substances listed in the RoHS directive are not found in the parts and materials used above the threshold level listed other than exceptions approved by the European Commission.

REACH Compliance Statement

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation 1907/2006/EC that addresses the production and use of chemical substances, and their potential impacts on human health and the environment. Based on information received from our supply sources, LasersCom LLC hereby states compliance of the parts and materials used in manufacturing to REACH regulation. LasersCom LLC does not manufacture or import any substances or preparations as defined under REACH.



*This product is sold
and supported by*



LASER LAB SOURCE
marketplace for **Scientists & Engineers**

Sold and supported by:
LaserDiodeSource.com
a division of Laser Lab Source
contact@laserlabsource.com
800-887-5065

Manufactured by:
LD4B
www.d4b.com