



525nm, 3 Watt Fiber-Coupled Laser Diode

105µm Fiber, FC Connector

RLS / 525NM-3W-105UM

OPTICAL SPECIFICATIONS

- Wavelength: 525nm ±5nm
- Output Power: 3 Watt
- Spectral Width (FWHM): 2 nm
- Wavelength Shift with Temp.: 0.06 nm/°C

FIBER SPECIFICATIONS

- Core Diameter: 105 µm Fiber
- NA: 0.22
- Connector: FC Connector (SMA905 Optional)
- Optional Spot Homogenizing Device Available (Inquire)

ELECTRICAL SPECIFICATIONS

- Threshold Current: 300 mA
- Operating Current: < 2.0 A
- Operating Voltage: 18 VDC
- Includes Internal Thermistor

ENVIRONMENTAL SPECIFICATIONS


- Operating Temperature Range: -40°C to 55°C
- Storage Temperature Range: -55°C to 70°C
- Relative Humidity: 20 ~ 80%
- Lead Soldering Temperature: 260°C
- Lead Soldering Time: 10 s

PACKAGE



- Weight: 250 g
- Dimensions: 60.0 mm x 39.0 mm x 20.0 mm

FIBER-COUPLED GREEN LASER DIODE

FC connector standard
105µm fiber

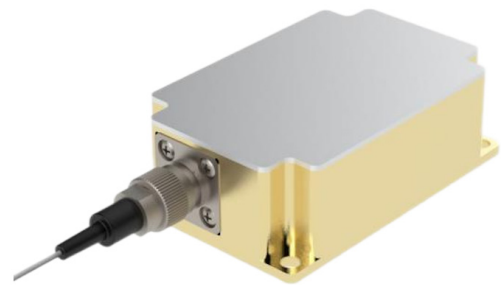

COMPACT PACKAGE
60 mm x 39 mm x 20 mm

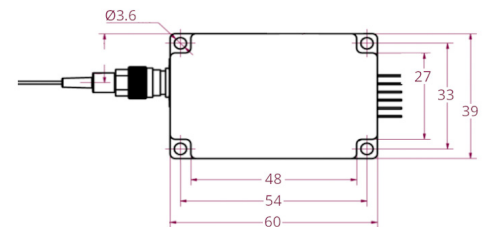

dimensions in mm

Illustrated with external fiber attached (not included)