


976nm Laser Module Stabilized with Narrow-Bandwidth Grating


LC95A76ULR-20R

Features:

- >250mW output power
- Polarization maintaining single-mode optical fiber
- Internal thermoelectric heatpump and monitor photodiode
- Hermetically sealed 14-pin butterfly package
- Spectral width smaller than 100pm
- RoHS compliant 

Applications:

- Blue light second-harmonic generation
- Frequency mixing

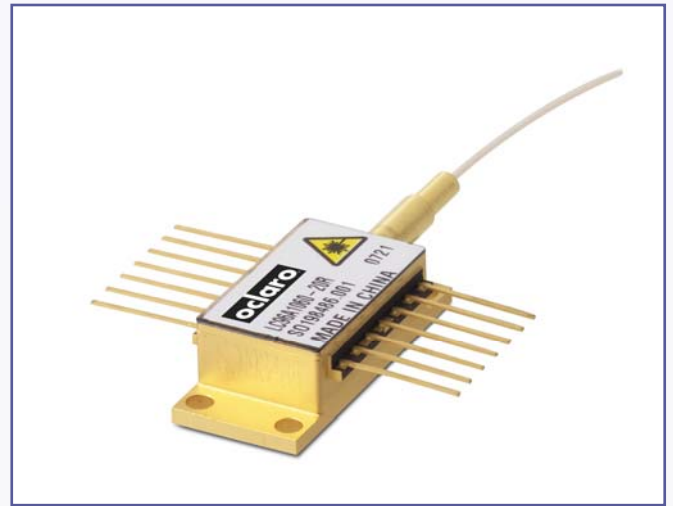

The Oclaro LC95A76ULR-20R single-mode laser module with narrow-bandwidth grating has been designed to provide the stringent noise and bandwidth performance required for second harmonic generation and frequency mixing applications. The laser with narrow-band grating allows high output powers that are very stable with both time and temperature while providing enhanced wavelength and power stability performance. The narrow-bandwidth grating is located in the polarization maintaining fiber pigtail.

Characteristics

Conditions unless otherwise stated:

Case temperature -20 to +75°C

Submount temperature 25°C

Monitor diode bias -5 V

CW operation

Parameter	Min	Typ	Max	Unit
Threshold Current (I_{th})		35	50	mA
Operating Drive Current (I_f)			700	mA
Operating Power (P_{op})	250	300		mW
Forward Voltage (V_f)		1.9	2.5	V
Peak Wavelength (λ_p)	975.5	976.0	976.5	nm
Spectral Width (FWHM)		35	100	pm
Temperature Dependence of Peak Wavelength		7	20	pm/K
Monitor Detector Responsivity	0.3			$\mu\text{A}/\text{mW}$
Monitor Dark Current			100	nA
Thermistor Resistance (at 25°C)	9.5	10	10.5	k Ω
Intended Laser Submount Operating Temperature	24	25	26	°C
Power Stability (RMS, 100-250mW, 25°C, 20Hz-2MHz)			0.25	%
Heatpump Current ($\Delta T = 50^\circ\text{C}$, $I_f = 700\text{mA}$)			1.85	A
Heatpump Voltage ($\Delta T = 50^\circ\text{C}$, $I_f = 700\text{mA}$)			3	V
Polarization Extinction Ratio	13	17		dB

Absolute Maximum Ratings


Parameter	Min	Max	Unit
Operating Temperature	-20	75	°C
Storage Temperature	-40	80	°C
Laser Forward Current		800	mA
Laser Reverse Voltage		2	V
Heatpump Current		2.5	A
Heatpump Voltage		3	V
Lead Soldering Temperature (10s max)		260	°C
Fiber Bend Radius	30		mm

Fiber Specification

Nuferm PM980-HP or equivalent 250µm primary coated fiber

Connections

Pin #	Description	Pin#	Description
1	Peltier cooler (+)	8	Not connected
2	Thermistor	9	Not connected
3	Monitor anode (-)	10	Laser anode (+)
4	Monitor cathode (+)	11	Laser cathode (-)
5	Thermistor	12	Not connected
6	Not connected	13	Case ground
7	Not connected	14	Peltier cooler (-)

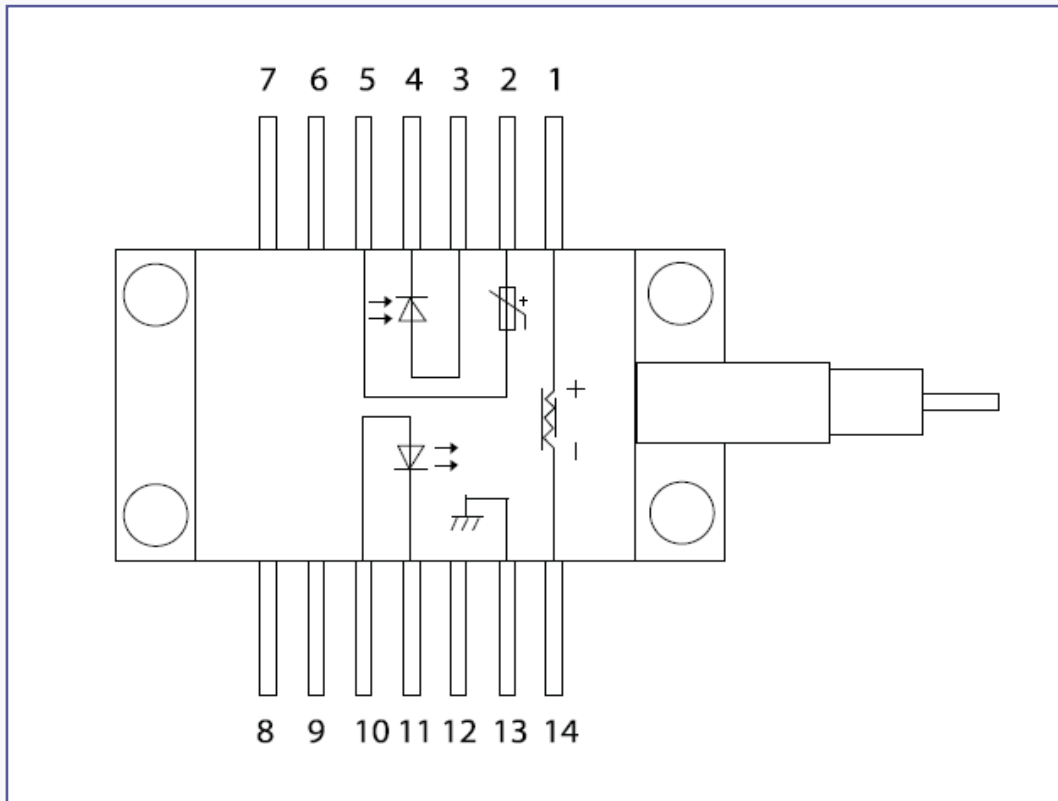

RoHS Compliance



Oclaro is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

Ordering Information

LC95A76ULR-20R 976nm Laser Module Stabilized with Narrow Bandwidth Grating

Contact Information


Oclaro Inc.
Worldwide Headquarters
 2584 Junction Avenue
 San Jose
 CA 95134
 USA

Tel: +1 408 383 1400
 Fax: +1 408 919 1501

www.oclaro.com
APSEurope@oclaro.com

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Oclaro before they become applicable to any particular order or contract. In accordance with the Oclaro policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Oclaro or others. Further details are available from any Oclaro sales representative.



BH12922 Rev 3.1 August 2009
 ©Oclaro 2009. Oclaro the Oclaro, Inc. logo, and all other Oclaro, Inc product names and slogans are trademarks or registered trademarks of Oclaro, Inc. in the U.S.A. or other countries. Products described in this datasheet may be covered by one or more patents in the U.S.A. and abroad. Information in this datasheet is subject to change without notice.