


Fiber Coupled Single Emitter Diode Laser (CW)

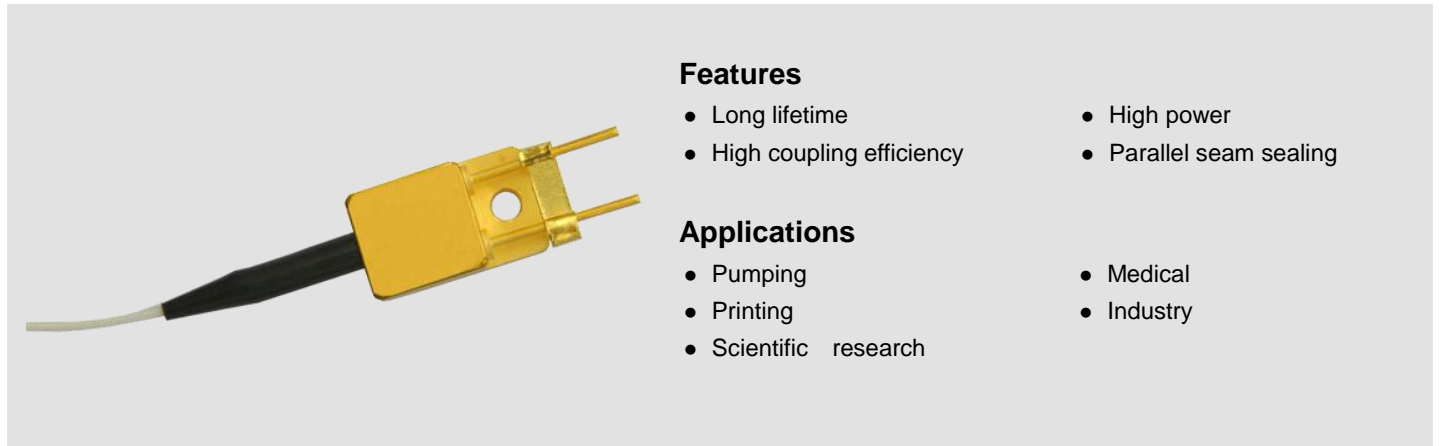


Features

- Long lifetime
- High coupling efficiency
- High power
- Parallel seam sealing

Applications

- Pumping
- Printing
- Scientific research
- Medical
- Industry

Device Dimension (mm)

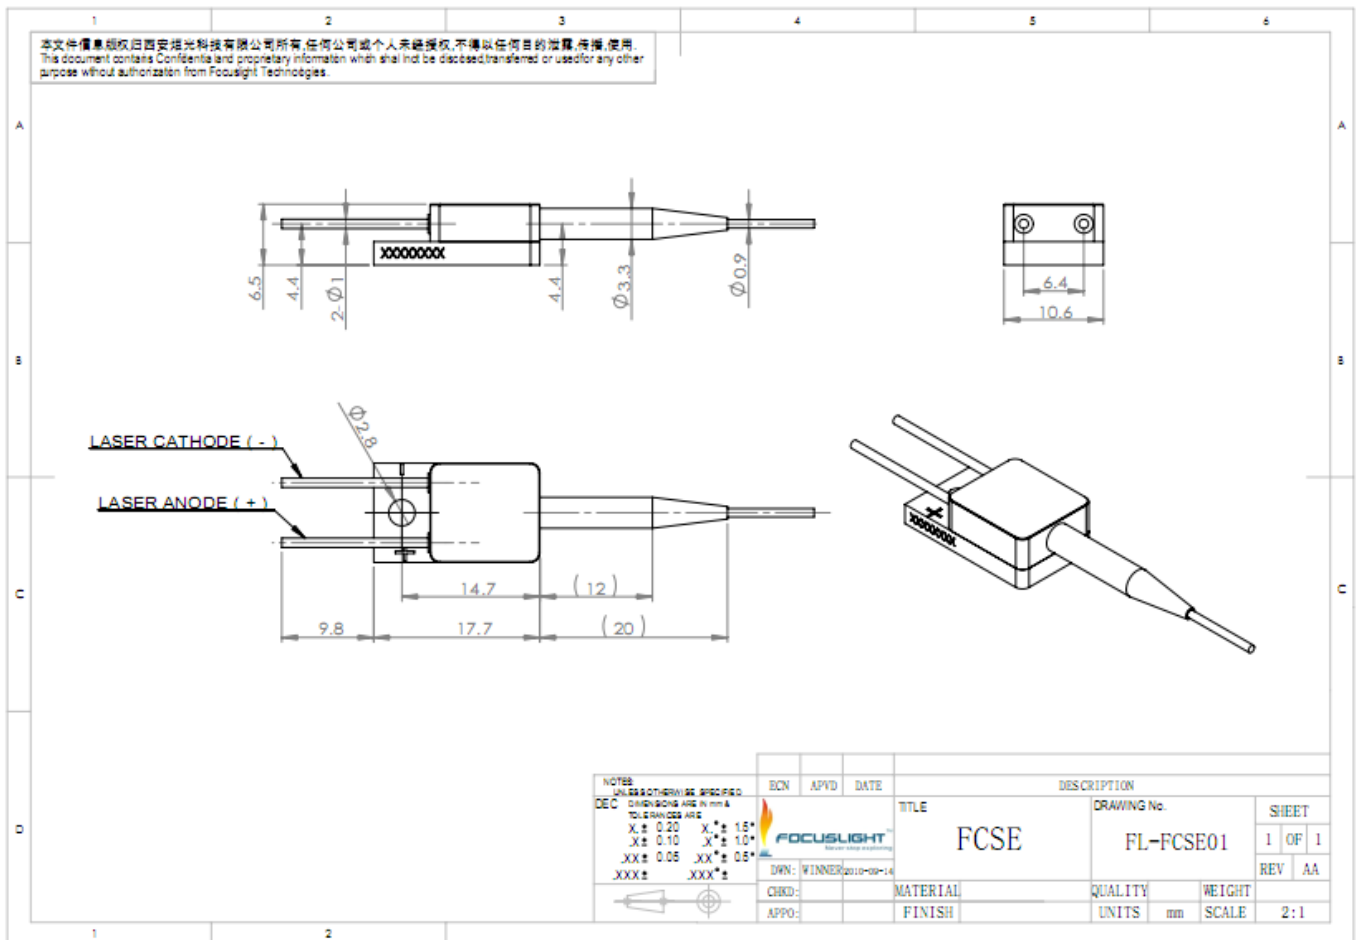

This structure drawing is only for reference. For any other special requirement, please feel free to contact us.

Fiber Coupled Single Emitter Diode Laser (CW)

Specification

Module Type ¹	Units	FL-FCSE01- 2-808	FL-FCSE01- 3-808	FL-FCSE01- 5-808	FL-FCSE01- 5-808	FL-FCSE01- 7-808
Optical ^{3,7}						
Center Wavelength λ	nm	808	808	808	808	808
Wavelength Tolerance	nm	± 3	± 3	± 3	± 3	± 3
Output Power ²	W	2	3	5	5	7
Spectral Width FWHM	nm	≤ 3	≤ 3	≤ 3	≤ 3	≤ 3
Spectral Width FW90%E	nm	≤ 4	≤ 4	≤ 4	≤ 4	≤ 4
Polarization Mode	-	TE	TM	TM	TM	TE
Wavelength Temp. Coefficient	nm/°C	~ 0.28	~ 0.28	~ 0.28	~ 0.28	~ 0.28
Fiber Parameters						
Fiber Numerical Aperture	NA	0.15	0.22	0.22	0.22	0.22
Fiber Core/Cladding Diameter	μm	105/125	200/220	200/220	400/440	200/220
Connector Type ⁶	-	SC	SMA905	SMA905	SMA905 or FC	SMA905
Fiber length ⁵	m	1.5	1.5	1.5	1.5	1.5
Electrical Parameters ^{3,7}						
Operating Current I_{op}	A	≤ 3	≤ 3.9	≤ 6.5	≤ 6.5	≤ 8.3
Threshold Current I_{th}	A	≤ 0.6	≤ 0.75	≤ 1.1	≤ 1.1	≤ 1.8
Operating Voltage V_{op}	V	≤ 2.2	≤ 2.1	≤ 2.2	≤ 2.2	≤ 2.2
Slope Efficiency	W/A	≥ 0.85	≥ 0.95	≥ 0.9	≥ 0.9	≥ 0.9
Power Conversion Efficiency	%	≥ 40	≥ 40	≥ 38	≥ 38	≥ 40
Thermal Parameters						
Operating Temperature	°C	15~30	15~30	15~30	15~30	15~30
Storage Temperature ⁴	°C	0~55	0~55	0~55	0~55	0~55
Recommended Thermal Dissipation Capacity	W	≥ 5	≥ 8	≥ 12	≥ 12	≥ 18

¹Explanation for the name of Module Type: FL (abbreviation of Focuslight) -FCSE01(structure code) -3(output power) -808(center wavelength).

²Reduced lifetime if used above nominal operating conditions.

³Data at 25°C temperature, unless otherwise stated.

⁴A non-condensing environment is required for storage and operation below ambient dew point.

⁵Fiber length can be specified by customer.

⁶Can be with or without fiber connector.

⁷If there are any other requirements, please contact us.

Fiber Coupled Single Emitter Diode Laser (CW)

Specification

Module Type ¹	Units	FL-FCSE01-3-915	FL-FCSE01-4-915	FL-FCSE01-8-915	FL-FCSE01-3-940
Optical ^{3,7}					
Center Wavelength λ	nm	915	915	915	940
Wavelength Tolerance	nm	± 5	± 5	± 5	± 5
Output Power ²	W	3	4	8	3
Spectral Width FWHM	nm	≤ 4	≤ 4	≤ 4	≤ 4
Spectral Width FW90%E	nm	≤ 6	≤ 6	≤ 6	≤ 6
Polarization Mode	-	TE	TE	TE	TE
Wavelength Temp. Coefficient	nm/°C	~ 0.32	~ 0.32	~ 0.32	~ 0.33
Fiber Parameters					
Fiber Numerical Aperture	NA	0.15 or 0.22	0.22	0.15 or 0.22	0.15
Fiber Core/Cladding Diameter	μm	105/125 or 400/440	200/220	105/125 or 400/440	105/125
Connector Type ⁶	-	SC or SMA905	SMA905	SC or SMA905	SC
Fiber length ⁵	m	1.5	1.5	1.5	1.5
Electrical Parameters ^{3,7}					
Operating Current I_{op}	A	≤ 3.8	≤ 4.8	≤ 9.2	≤ 3.8
Threshold Current I_{th}	A	≤ 0.5	≤ 0.8	≤ 0.8	≤ 0.5
Operating Voltage V_{op}	V	≤ 2	≤ 1.85	≤ 2	≤ 2
Slope Efficiency	W/A	≥ 0.85	≥ 0.9	≥ 0.9	≥ 0.85
Power Conversion Efficiency	%	≥ 42	≥ 42	≥ 40	≥ 42
Thermal Parameters					
Operating Temperature	°C	15~30	15~30	15~30	15~30
Storage Temperature ⁴	°C	0~55	0~55	0~55	0~55
Recommended Thermal Dissipation Capacity	W	≥ 8	≥ 10	≥ 20	≥ 8

¹Explanation for the name of Module Type: FL (abbreviation of Focuslight) -FCSE01(structure code) -3(output power) -808(center wavelength).

²Reduced lifetime if used above nominal operating conditions.

³Data at 25°C temperature, unless otherwise stated.

⁴A non-condensing environment is required for storage and operation below ambient dew point.

⁵Fiber length can be specified by customer.

⁶Can be with or without fiber connector.

⁷If there are any other requirements, please contact us.

Fiber Coupled Single Emitter Diode Laser (CW)

Specification

Module Type ¹	Units	FL-FCSE01-4-940	FL-FCSE01-3-976	FL-FCSE01-4-976	FL-FCSE01-8-976
Optical ^{3,7}					
Center Wavelength λ	nm	940	976	976	976
Wavelength Tolerance	nm	± 5	± 5	± 5	± 5
Output Power ²	W	4	3	4	8
Spectral Width FWHM	nm	≤ 4	≤ 4	≤ 4	≤ 4
Spectral Width FW90%E	nm	≤ 6	≤ 6	≤ 6	≤ 6
Polarization Mode	-	TE	TE	TE	TE
Wavelength Temp. Coefficient	nm/°C	~ 0.33	~ 0.34	~ 0.34	~ 0.34
Fiber Parameters					
Fiber Numerical Aperture	NA	0.22	0.15	0.22	0.15
Fiber Core/Cladding Diameter	μm	200/220	105/125	200/220	105/125
Connector Type ⁶	-	SMA905	SC	SMA905	SC
Fiber length ⁵	m	1.5	1.5	1.5	1.5
Electrical Parameters ^{3,7}					
Operating Current I_{op}	A	≤ 4.8	≤ 3.8	≤ 5	≤ 9.2
Threshold Current I_{th}	A	≤ 0.8	≤ 0.5	≤ 0.7	≤ 0.8
Operating Voltage V_{op}	V	≤ 1.85	≤ 2	≤ 1.85	≤ 2
Slope Efficiency	W/A	≥ 0.9	≥ 0.85	≥ 0.85	≥ 0.9
Power Conversion Efficiency	%	≥ 42	≥ 42	≥ 40	≥ 40
Thermal Parameters					
Operating Temperature	°C	15~30	15~30	15~30	15~30
Storage Temperature ⁴	°C	0~55	0~55	0~55	0~55
Recommended Thermal Dissipation Capacity	W	≥ 10	≥ 8	≥ 10	≥ 20

¹Explanation for the name of Module Type: FL (abbreviation of Focuslight) -FCSE01(structure code) -3(output power) -808(center wavelength).

²Reduced lifetime if used above nominal operating conditions.

³Data at 25°C temperature, unless otherwise stated.

⁴A non-condensing environment is required for storage and operation below ambient dew point.

⁵Fiber length can be specified by customer.

⁶Can be with or without fiber connector.

⁷If there are any other requirements, please contact us.



Focuslight Technologies Co., Ltd.

Add: No.17 Xinxu Road, New Industrial Park
Xi'an, Shaanxi, P.R.China 710119

Tel: +86-29 8888 0786

Fax: +86-29 8888 7075

Email: sales@focuslight.com.cn

Website: www.focuslight.com.cn

Copyright ©2009 Focuslight. All rights reserved.

