

80W 9xxnm 20% Fill Factor High Power Laser Diode Bar on Passive Cu Block Cooler

BPC9xx-80C-660 & BPC10xx-80C-660

Features:

- Mounted 10mm laser diode bar
- Passive 1" x 1" Cu block cooler
- 20% fill factor (100µm / 500 µm pitch)
- 80W operating power
- Highly reliable single quantum well MBE structure
- Telecom-grade AuSn mounting technology
- Standard wavelengths at 915nm, 940nm, 980nm and 1030nm (others available on request)
- RoHS compliant 

Applications:

- Collimated solid-state laser pumping
- Direct applications such as material processing
- Printing
- Medical



The Oclaro BPC9xx-80C-660 & BPC10xx-80C-660 20% fill factor laser diode bar on passive cooler series has been designed to provide the increased brightness and reliability required for collimated pumping of next generation solid-state lasers and direct applications. The proprietary E2 front mirror passivation process, developed at our Zurich site, prevents Catastrophic Optical Damage (COD) to the laser diode facet even at extremely high output powers. The laser diode bars are mounted on an expansion matched submount onto a Cu block package providing very high reliability in CW and pulsed (1-Hz type) applications.

Characteristics (typical values)

Parameter	Symbol	Unit	BPC915-80C-660 BPC940-80C-660 BPC980-80C-660	BPC1030-80C-660
Product Name				
CW Output Power	P_{op}	W	80	80
Center Wavelength ^[1]	λ_c	nm	915 ± 10 940 ± 10 980 ± 10	1030 ± 10
Spectral Width (FWHM)	$\Delta\lambda$	nm	3	4
Wavelength Shift with Temperature	$d\lambda_c/dT_{op}$	nm/°C	0.3	0.3
Beam Divergence	$\theta_{//}$ (FWHM)	deg	5.5	5.5
	$\theta_{//}$ (90%PC)		6	6
	θ_{\perp} (FWHM)		26	26
	θ_{\perp} (90%PC)		45	45
Polarization TE ^[2]	–	%	95%	95%
Threshold Current	I_{th}	A	8	8
Slope Efficiency	η_D	W/A	1.1	1.1
Conversion Efficiency	H	%	62	62
Operating Current	I_{op}	A	81	83
Operating Voltage	V_{op}	V	1.65	1.5
Operating Temperature	T_{op}	°C	25 ± 5	25 ± 5


[1] Reduced wavelength window / extended range available on request (910-1070nm).

[2] Direction of polarization is parallel to the bar.

Bar Dimensions

Parameter	Symbol	Typical	Unit
Bar Width	b	10	mm
Number of Emitters	n	19	-
Emitter Spacing	p	500	µm
Emission Width	w	100	µm
Fill Factor	f	20	%
Bar Smile (when mounted)	s	<2	µm

Passive Cu Block Cooler Dimensions (mm)

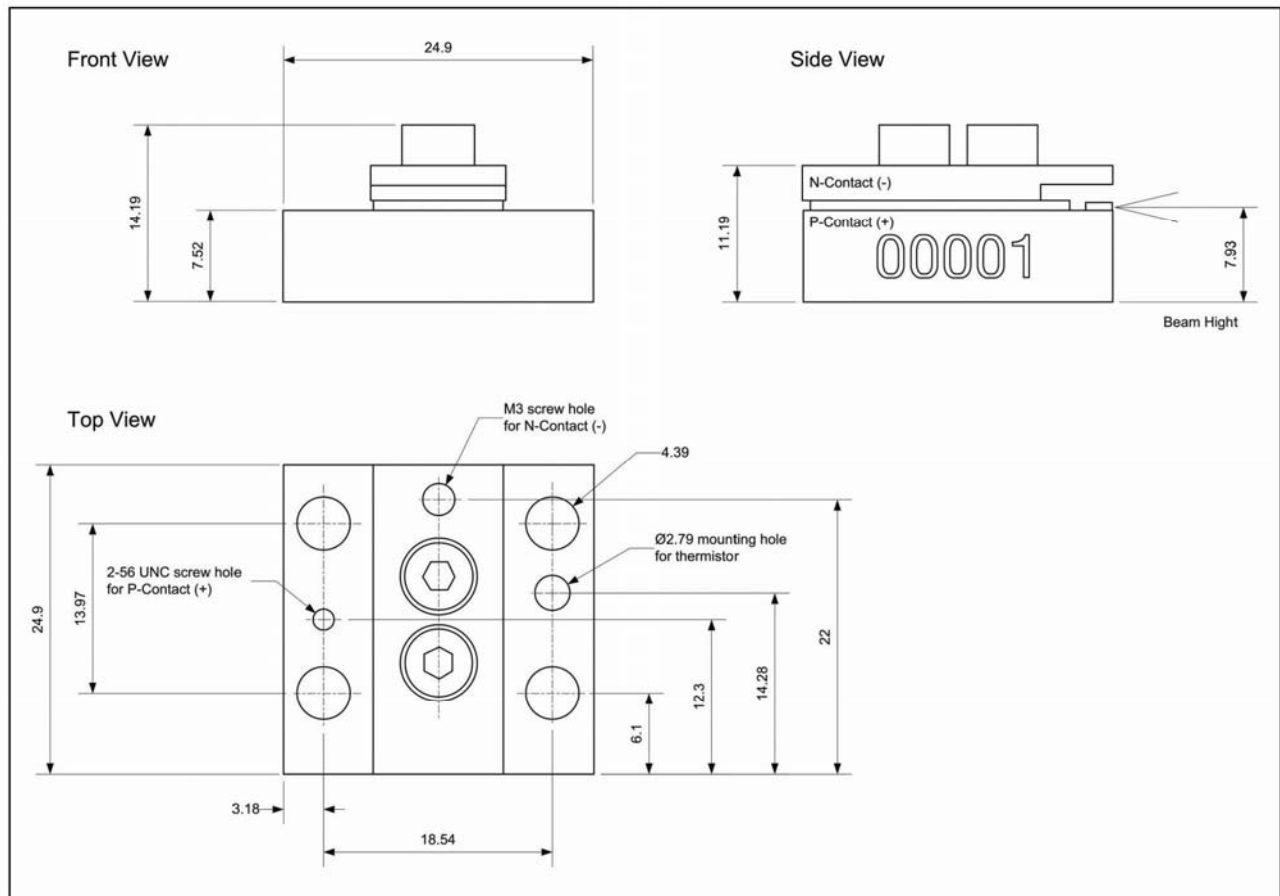

RoHS Compliance



Oclaro is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

Ordering Information:

BPCxxx-80C-660r 80W 20% Fill Factor Laser Diode Bar on Passive Cu Block Cooler
 xxx is the center wavelength between 910 and 1030nm,
 r indicates wavelength tolerance and smile (see table).

smile \ WL	> ±5nm	≤ ±5nm	≤ ±3nm
> ±2.0µm	A	B	C
≤ ±2.0µm	F	G	H
≤ ±1.5µm	L	M	N

Contact Information

www.oclaro.com

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Oclaro before they become applicable to any particular order or contract. In accordance with the Oclaro policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Oclaro or others. Further details are available from any Oclaro sales representative.



BH13480 Rev 1.0 May, 2011
 ©Oclaro 2011. Oclaro the Oclaro, Inc. logo, and all other Oclaro, Inc product names and slogans are trademarks or registered trademarks of Oclaro, Inc. in the U.S.A. or other countries. Products described in this datasheet may be covered by one or more patents in the U.S.A. and abroad. Information in this datasheet is subject to change without notice.