

# ADL-80Y04TL

## Infrared Laser Diode



6-2D-LD80-009\_Rev.01




### 808nm 200mW High Power Operation

#### • Features

1. Low threshold current
2. Low operation current
3. High pumping efficiency
4. Stable wavelength
5. High reliability

#### • Applications

1. Pumping source for DPSS green laser
2. Medical applications

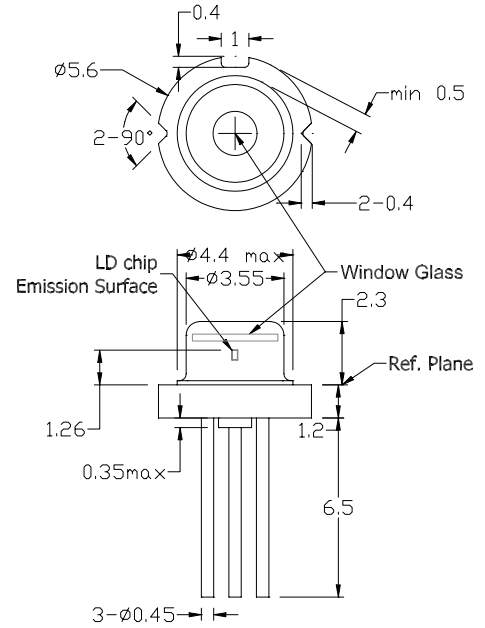

#### • Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	$P_O$	CW	200	mW
Reverse voltage (LD)	$V_{RL}$		2	V
Reverse voltage (PD)	$V_{RD}$		30	V
Forward current (PD)	$I_{FD}$		10	mA
Case temperature	$T_C$	-	-10~+50	°C
Storage temperature	$T_S$	-	-40~+85	°C

#### • Electrical and optical characteristics ( $T_C=25^\circ\text{C}$ )







Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions (CW)
Peak wavelength	$\lambda$	805	808	811	nm	$P_o=200\text{mW}$
Threshold current	$I_{th}$	-	60	75	mA	
Operating current	$I_{op}$	-	225	260	mA	
Operating voltage	$V_{op}$	-	1.9	2.1	V	
Differential efficiency	$\eta$	0.8	1.2	-	mW/mA	$P_o=150\text{-}200\text{mW}$
Monitor current - L type	$I_m$	0.3	1.2	2.0	mA	$P_o=200\text{mW}$
Parallel divergence angle	$\theta_{  }$	-	8	11	deg	
Perpendicular divergence angle	$\theta_{\perp}$	-	39	48	deg	
Parallel FFP deviation angle	$\Delta\theta_{  }$	-3	0	+3	deg	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-5	0	+5	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	0	+80	um	

#### • Precautions

- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.



\* For reference only. Contents above are subject to change without notice.

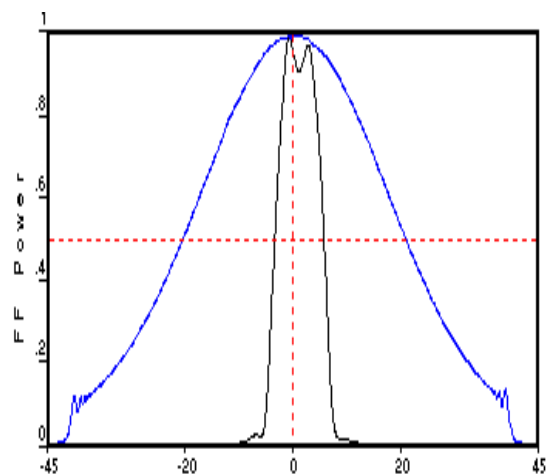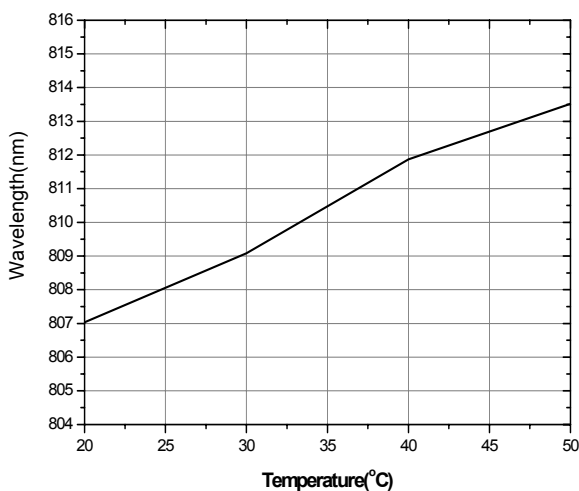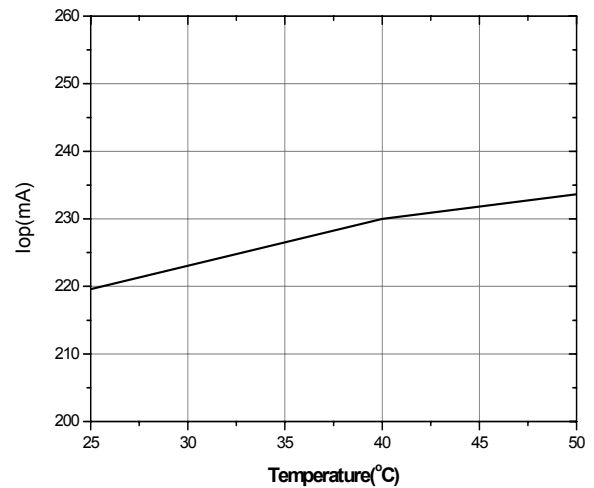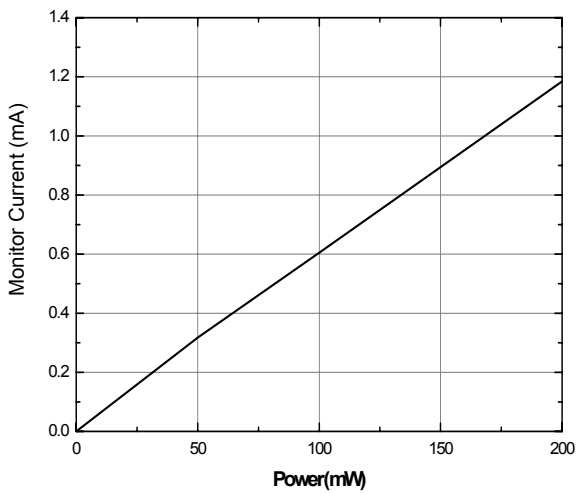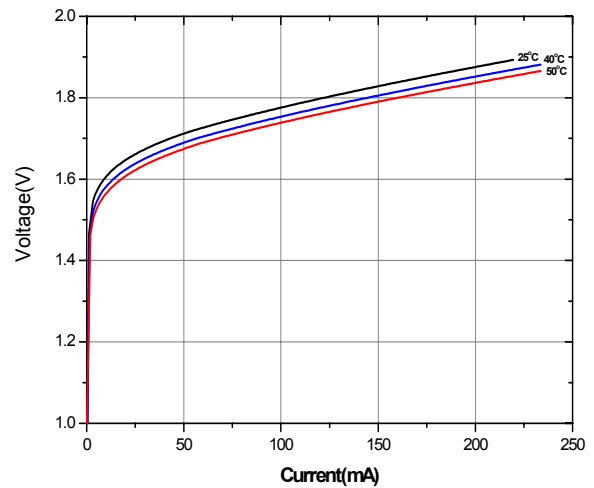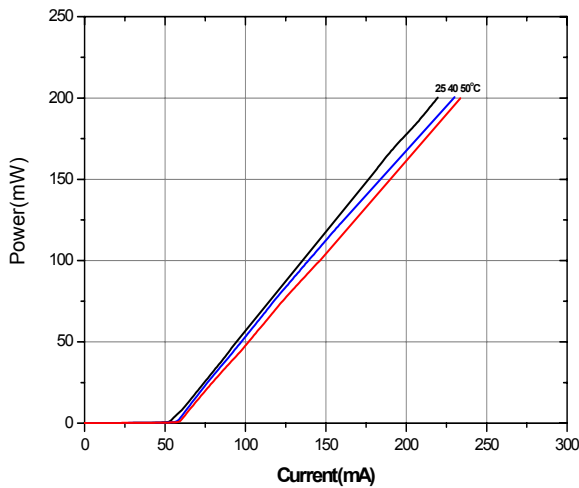

\* For reference only. Contents above are subject to change without notice.

[www.lasercomponents.com](http://www.lasercomponents.com)

01/10 / V2 / HW / divers-vis/ari/808nm/ adl-80y04tl.pdf

Germany and other countries: LASER COMPONENTS GmbH, Phone: +49 8142 2864 0, Fax: +49 8142 2864 11, [info@lasercomponents.com](mailto:info@lasercomponents.com)  
 USA: LASER COMPONENTS IG, Inc., Phone: +1 603 821 7040, Fax: +1 603 821 7041, [info@laser-components.com](mailto:info@laser-components.com)  
 Great Britain: LASER COMPONENTS (UK) Ltd., Phone: +44 1245 491 499, Fax: +44 1245 491 801, [info@lasercomponents.co.uk](mailto:info@lasercomponents.co.uk)  
 France: LASER COMPONENTS S.A.S., Phone: +33 1 3959 5225, Fax: +33 1 3959 5350, [info@lasercomponents.fr](mailto:info@lasercomponents.fr)

**Arima**  
LASERS