
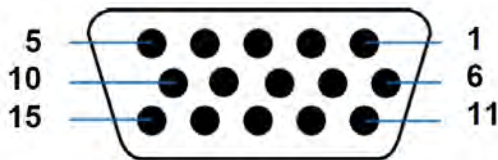
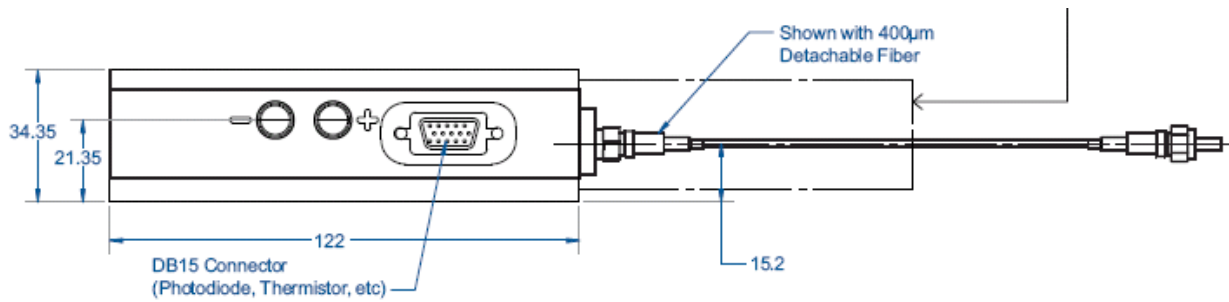


Item Number: 6308-0005**Item Description: 880nm wavelength stabilized, 120W, 400µm fiber-coupled module**

Parameter	Units	Minimum	Typical	Maximum
Optical				
CW Output Power from Fiber	W	120		
Center Wavelength	nm	878.5	880.0	881.5
Spectral Width (FWHM)	nm			1.0
Fiber Core Diameter	µm		400	
Fiber NA	-		0.22	
Temperature tuning coefficient	nm/°C		0.08	
Electrical (FCA)				
Operating Current (I _{OP})	A		58	60
Operating Voltage (V _{OP})	V		5.25	5.4
E-O conversion efficiency	%		40	
Thermal				
Operating Temperature	°C	20	25	30
Storage Temperature	°C	-20		70
Mechanical				
Module dimensions	mm		122 x 100 x 34.4	
Fiber length	m		2	
Fiber Input connector	-		HP-SMA 905	
Thermistor				
Type	-		NTC	
Resistance at 25°C	KΩ		10	
Optional Aiming Beam				
Wavelength	nm			635 +/- 10
Optical power	mW			>=1.0
Optional Monitoring Photo Diode				
Output signal at full power	µA	50		250
Control signal				
Interfacing	DB-15 connector at module back wall			

Notes

1. Performance data is verified at 25C module base plate temperature
2. Non-condensing operating environment required

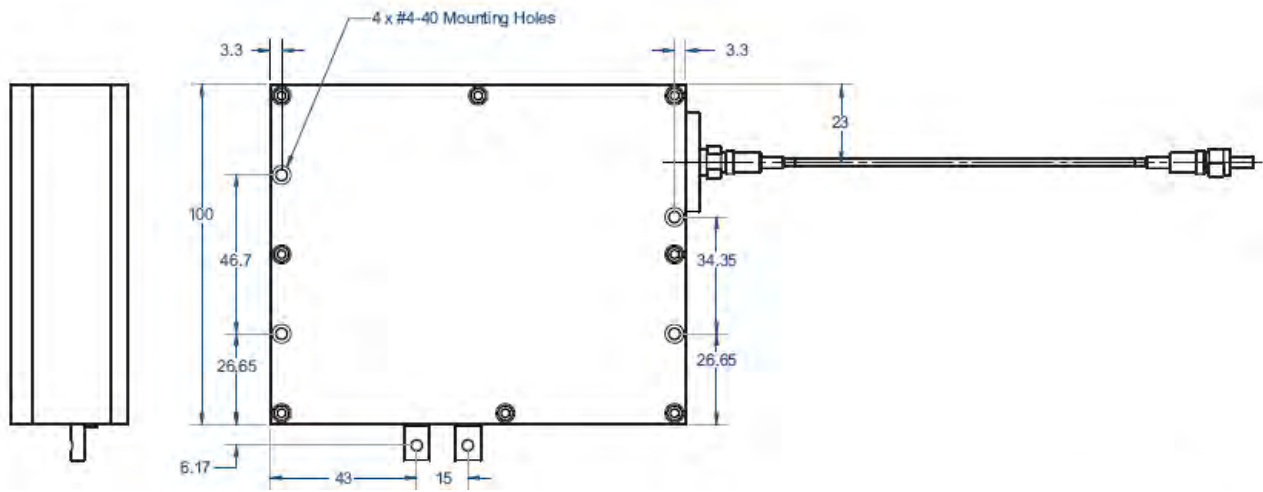

Pin number	Assignment
1	Thermistor
2	Thermistor
3	Not used
4	Not used
5	Monitor Photodiode +
6	Monitor Photodiode -
7	Not used
8	Not used
9	Not used
10	Not used
11	Not used
12	Not used
13	Not used
14	Aiming Beam +5V
15	Aiming Beam Ground

