




1064nm FBG Pulsed Laser Diode Source

800 mW Pulse / 400 mW CW Output Power

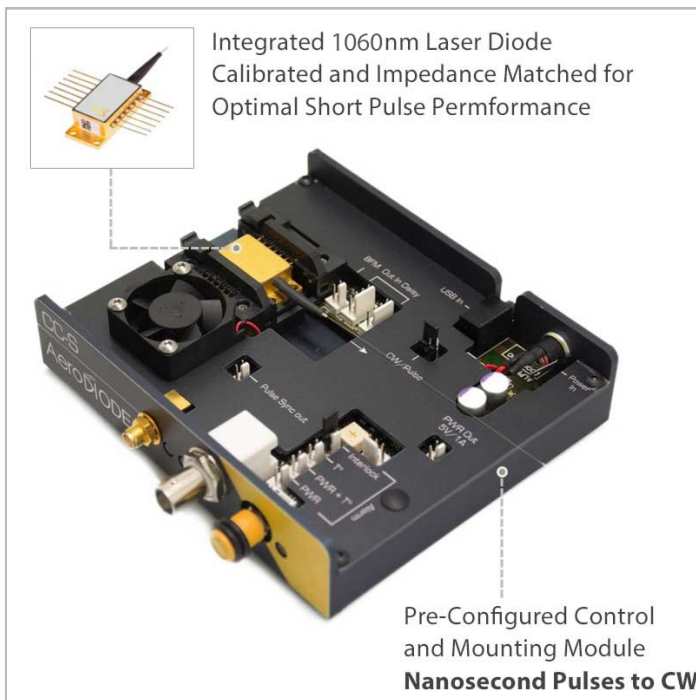

1064LD-1-2-6 / LASER-DIODE

FEATURES

- o Pulse Output Power up to 800mW
- o CW Output Power up to 400mW
- o Fiber Bragg Grating Stabilized
- o PM Fiber SM98-PS-U25D-H
- o FC/APC Terminated
- o Integrated TE Cooler, Thermistor, Monitor PD
- o Hermetically Sealed 10-Pin Butterfly Package

APPLICATIONS

- o Fiber Laser Systems
- o Frequency Conversion

1064NM GRATING STABILIZED

This wavelength stabilized high power laser module has been designed as a light source for narrow bandwidth fiber laser and direct frequency conversion applications.

A fiber Bragg grating (FBG) is located within the fiber about 1 m from the laser diode butterfly module. The small back-reflection generated by the FBG provides a very stable and narrow emission spectrum at the center wavelength of 1060 nm \pm 0.5 nm. It is not possible to tune the wavelength by tuning the laser diode chip temperature as the FBG "locks" the wavelength at 1060 nm.

Note: this laser diode is based on a Fabry-Perot technology with Bragg grating. The laser pulse takes ~100 ns to lock on the Bragg Wavelength. Short pulses have a significantly broader bandwidth than 1 nm.



1060NM FBG PULSE SOURCE SYSTEM SPECIFICATIONS

1060NM FBG LASER DIODE OPTICAL OUTPUT SPECIFICATIONS

- Adjustable Pulse Width Range: 1 Nanosecond to CW
- Center Wavelength: 1060 nm (± 0.5 nm)
- Pulsed Peak Output Power: 800 mW
- CW Output Power: 400 mW
- SMSR (<10ns pulse width): > 25dB
- Spectral Width (FWHM @ 100ns Pulse Width): 200 kHz (typical)
- Duty Cycle Range: < 5%
- Temperature tuning (20 - 50°C range) : ~ 0.06 nm / °C

CONTROL ELECTRONICS AND MOUNTING MODULE: PULSED AND CW ELECTRONICS SPECIFICATIONS

- On-Board Generator Pulse Width Range: 0.5 - 500 nanoseconds
- External Trigger Pulse Width Range: 0.5 nanoseconds - CW
- Internal Pulse Generator Adjustment Precision: 10 picoseconds
- Optical Pulse Jitter: < 25 ps
- On-Board Pulse Generator Repetition Rate Range: 1Hz - 4MHz
- Output Current Pulsed Mode: 0.00 mA - 1.60 Amps
- Output Current CW Mode: 0.00 mA - 800.00 mA
- Output Voltage Maximum: 4.8 Volts
- Current Noise and Ripple (100Hz to 10 MHz): < 0.03% of Full Scale
- Current Set-point Resolution @ 500mA: <0.1 mA
- Current Set-point Resolution @ 1000mA: <0.3 mA

FIBER BRAGG GRATING NOTE:

A fiber Bragg grating (FBG) is located within the fiber about 1 m from the laser diode butterfly module. The small back-reflection generated by the FBG provides a very stable and narrow emission spectrum at the center wavelength of 1060 nm ± 0.5 nm. It is not possible to tune the wavelength by tuning the laser diode chip temperature as the FBG "locks" the wavelength at 1060 nm.

This laser diode is based on a Fabry-Perot technology with fiber Bragg grating. The laser pulse takes ~ 100 ns to lock on the Bragg Wavelength. Short pulses have a significantly broader bandwidth than 1 nm.

The system can be ordered without the fiber Bragg grating - inquire for price and lead time details.

CONTROL ELECTRONICS AND MOUNTING MODULE:

TEMPERATURE CONTROLLER & MOUNTING SOCKET SPECIFICATIONS

- Laser diode chip temperature tuning range: 20 - 50 °C
- TEC Controller Compatible with NTC Thermistors: 1k Ω - 100 k Ω
- Mounting Socket Base Material: Anodized Aluminum
- Mounting Socket Technology²: Zero Insertion Force Socket

USER INTERFACE , DIMENSIONS AND POWER INPUT

- Interface: USB
- OS Compatibility: Windows XP / Windows 7
- Control Software: Control Software - Windows GUI Included
- Input Power Supply: 12 VDC (220V/110V adapter included)
- Module Dimensions: 126.8mm (W) x 130mm (L) x 32.5mm(H)
- Libraries: DLLs - Hexa/Linux - Labview - Python
- Analog Interface (0-3.3V): Peak Power Adjustment

DFB LASER DIODE FIBER AND CONNECTOR

- Fiber Type: PM, Polarization Maintaining Nufern PM980-HP or equivalent
- Mode Field Diameter: 6 μ m
- Buffer Diameter: 250 μ m
- Fiber Length: 1 meter
- Connector: FC/APC, PM Aligned to Slow Axis
- Integrated Fiber Bragg Grating
- Also available without Fiber Bragg Grating (inquire)



PRE-CONFIGURED 1064NM LASER DIODE PULSE SOURCE SYSTEM

These CW 1064 nm laser source & control modules offer the user a pre-configured, calibrated solution for test and sensing applications. A fiber Bragg grating is installed in the fiber, about 1 m from the butterfly package. Both the chip in the butterfly package and the package itself were designed and optimized to provide excellent long term reliability. The coupling of the laser light into the fiber is based on proprietary techniques and manufacturing processes that provide high peak output power. The power is very stable over time and over temperature.

INTEGRATED LASER DIODE SOURCE

The laser package style is a 14-pin butterfly which is fiber coupled with PM fiber. The laser is rated for operating powers up to 1500 mW pulsed output power, and the control system is able to drive the laser to output up to 800mW power in pulse mode. The source laser butterfly package incorporates a thermoelectric cooler (TEC), a

precision NTC thermistor and a back-facet monitoring photodiode. All of these integrated elements can be controlled and monitored through the control electronics module. These sources have a Polarization Maintaining Fiber (PMF) pigtail. Other key features of these 1064 nm devices include high polarization extinction ration and long MTTF.


LASER DIODE CONTROL ELECTRONICS AND BUTTERFLY MOUNTING MODULE

The control electronics and mounting module for these laser diodes delivers high stability bias current, a precision TEC controller and a pre-configured ZIF mounting socket. These control modules offer multiple mechanical, thermal and electronic protection features. They ensure that your laser diode is protected and operated safely. The on-board TEC controller incorporates a fast feedback PID control loop to provide high temperature set-point stability. A user-set temperature limit keeps the source from thermal damage. Additionally, multiple bias current / voltage protection features are designed to keep the source safe from ESD, power outages and reverse voltage. A user controlled current limit clamps the current at the set limit level.

USB AND CONTROL SOFTWARE

The user can set and monitor all of the control parameters of the 1064nm source laser using the USB input and the supplied GUI software. These units ship with the USB cable to connect your PC to the connector on the side panel. A simple to use single page menu graphical user interface allows you to control all of the pulse or CW parameters as well as set current and temperature limits. Other features of these control modules include a daisy chain output, sync output, alarm monitor and back facet monitor output to monitor the DFB laser's power.

Butterfly Laser Type-1 Pinout

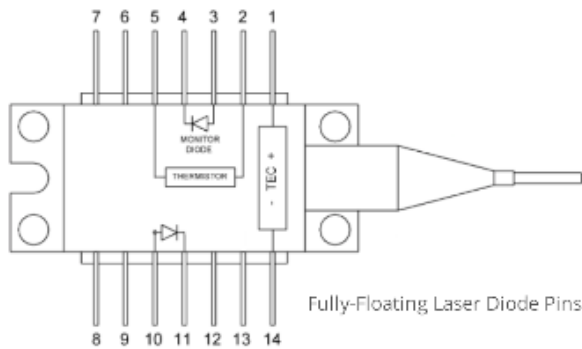

1	TEC (+)	8	NC
2	Thermistor	9	NC
3	PD Anode (+)	10	LD Anode (+)
4	PD Cathode (-)	11	LD Cathode (-)
5	Thermistor	12	NC
6	NC	13	Case Ground
7	NC	14	Thermistor (-)



Offered by
LASER LAB SOURCE



**LASER
DIODE
SOURCES**

PRODUCT SALES AND SERVICE:

Unlimited phone and email support is provided for products purchased through Laser Lab Source. Orders for this product are fulfilled by Laser Lab Source in North America and select international regions.

PRODUCT WARRANTY:

This product is sold with a full one-year warranty. It is warranted to be free from defects in material and/or workmanship for a period of one year from the date of shipment.



Laser Lab Source, a division of Research Lab Source, Inc.
670 S. Ferguson St., Suite 3
Bozeman, MT 59718 USA

Phone: 406-219-1472

www.LaserLabSource.com

AeroDiODE

Rue François Mitterrand Institut d'Optique d'Aquitaine
33400 Talence
FRANCE