


Mar. 2013

## 14xx-nm Pump Laser Diode Module (with FBG) (High power / Low power consumption)

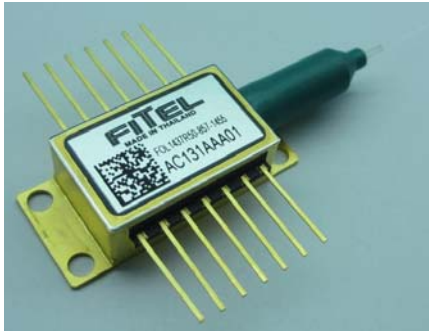

### Applications

- Pump Source for Raman Amplifier
  - C-band Raman

## Product Type : FOL1437 Series

### Descriptions

- The FOL1437 series (with FBG) has been designed for use in a wide variety of optical amplifier, such as Raman Amplifier used in optical transmission systems, especially in dense wavelength-division-multiplexing (DWDM) systems.
- A strained multi-quantum well laser diode chip is integrated with thermo-electric cooler (TEC), thermistor and PIN photodiode in a hermetically sealed 14 pin butterfly package.
- A 2-lens-system couples a round shape light from the laser chip efficiently to the fiber and enables the output power up to 500 mW.
- This laser module complies with telecom requirements described in Telcordia™ GR-468 requirement and manufactured in an ISO™9001 certified production line.


### Features

- Rated output power up to 500 mW (CW)
- Widely deployed reliable package design with industry compatible 14 pin butterfly footprint
- Internal Thermo-electric cooler (TEC) and Thermistor for stable operation
- Integrated PIN photodiode for back facet monitor
- Polarization maintaining fiber pigtail
- Wavelength stabilization available with external FBG
- EU RoHS compliant (Exemption 7(c)-1, 13(a) applied)

ODC-DC003

# Data Sheet

## FOL1437 Series (with FBG)

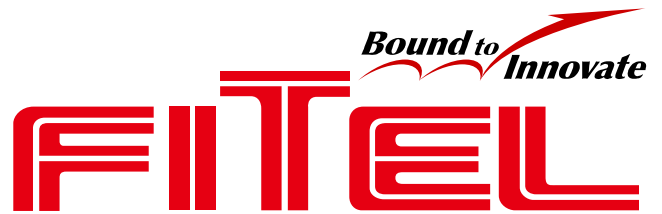

Mar. 2013

### Absolute Maximum Rating

Parameters	Sym.	Min.	Max.	Unit
Storage Temperature	Tstg	-40	85	°C
Operating Case Temperature	Tc	-20	70	°C
LD Forward Current	If		2100	mA
LD Reverse Voltage	Vr	-	2	V
PD Forward Current	IfPD	-	5	mA
PD Reverse Voltage	VrPD	-	20	V
TEC Current	Ic		4.5	A
TEC Voltage	Vc		4.5	V

### Specifications

(LD Temperature (Ts) = 25°C)

Parameters	Sym.	Min.	Typ.	Max.	Unit	Conditions
Output Power <sup>1)</sup>	Pf	Table A			mW	
Forward Current	If	Table A			mA	
Center Wavelength(FBG)	$\lambda$	$\lambda-1.5$	$\lambda$	$\lambda+1.5$	nm	RMS(-20dB), Rated Power $\lambda=1420\sim 1465\text{nm}$ for FBG
Spectral Width <sup>2)</sup>	$\Delta\lambda$	-	-	3	nm	RMS(-20dB), Rated Power
Forward Voltage	Vf	Table A			V	Rated Power
Forward Current at EOL	IfEOL	-	-	1.15xIfBOL	mA	
Monitor Current	Im	100	-	2000	$\mu\text{A}$	VrPD=5V, Rated Power
Monitor Dark Current	Id	-	-	100	nA	VrPD=5V
Extinction Ratio	Re	16	-	-	dB	
TEC Specification	-	Table A				
Thermistor Resistance	Rth	9.5	10	10.5	k $\Omega$	Ts = 25°C
Thermistor B Constant	Bth	-	3900	-	-	Ts = 25°C

1) Pf: Available Pf may depend upon center wavelength selected.

2)  $\lambda$ c: Selected center wavelength from 1420nm to 1465nm available.

### Table A

\*:EOL


Part Number	Pf(mW)	If(mA) max	Vf(V) max	Tc(°C)	Itec(A)* max	Vtec(V)* max	Wtotal(W)* max
FOL1437R40	400	1300	2.1	70	2.6	3.1	10.5
FOL1437R45	450	1500	2.2	70	2.8	3.3	12
FOL1437R50	500	1700	2.3	70	3.0	3.5	13.5

ODC-DC003

# FOL1437 Series (with FBG)

Mar. 2013


## Pin Assignment

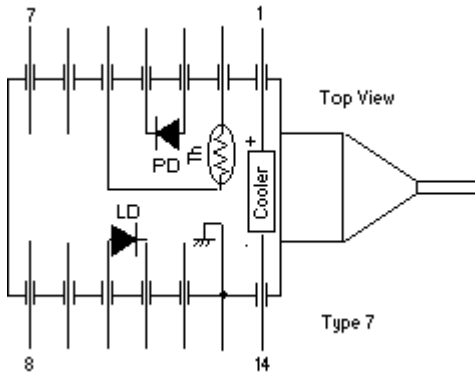

Pin#	Function	Pin#	Function
1	Cooler(+)	8	No Connection
2	Thermistor	9	No Connection
3	PD anode(-)	10	LD anode(+)
4	PD cathode(+)	11	LD cathode(-)
5	Thermistor	12	No Connection
6	No Connection	13	Case GND
7	No Connection	14	Cooler(-)


## Dimensions

### FOL1437Rxx-857-xxxx (w/2FBGs)

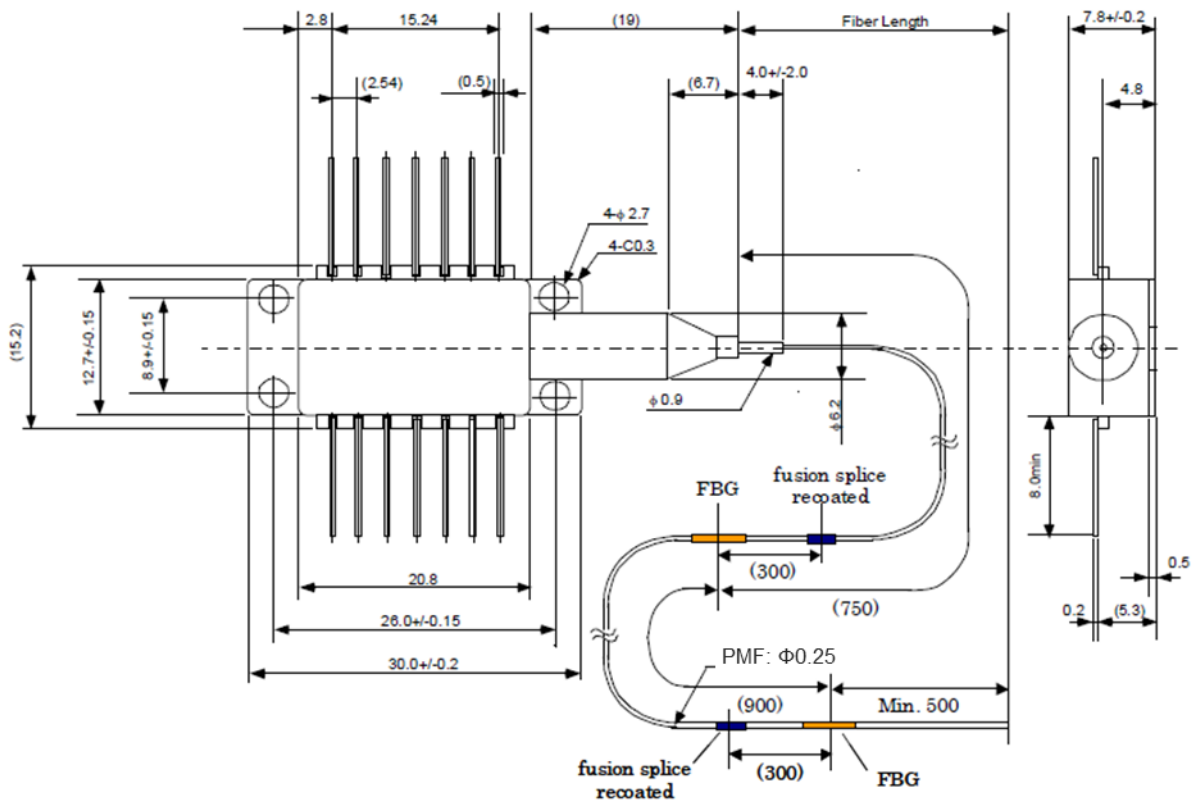


# Data Sheet

## FOL1437 Series (with FBG)

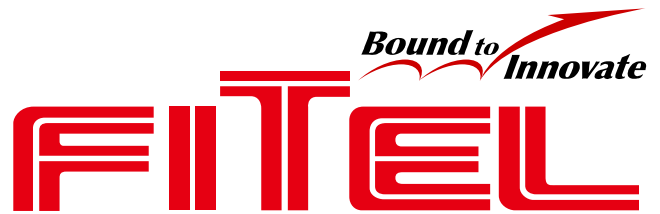

Mar. 2013

### Ordering information

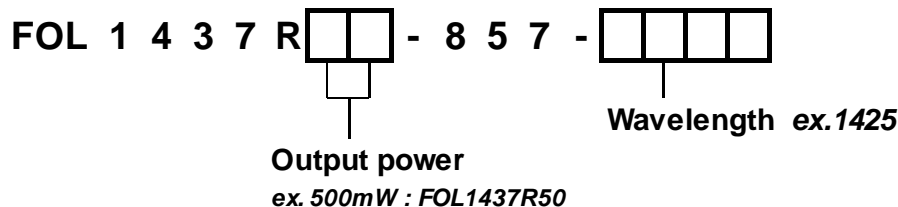

### Safety information

This product complies with 21 CFR 1040.10 and 1040.11, Class IV laser product. Invisible laser radiation is emitted from the end of the fiber or connector. Avoid direct exposure to the beam.



ISO is a trademark of The International Organization for Standardization.

Telcordia is a trademark of Telcordia Technologies, Inc.

Furukawa Electric reserves the right to improve, enhance and modify the features and specifications of FITEL products without prior notifications.

## FURUKAWA ELECTRIC CO., LTD.

**Japan**  
Head Office  
2-2-3, Marunouchi  
Chiyoda-ku  
Tokyo 100-8322, JAPAN  
Tel: +81-3-3286-3253  
Fax: +81-3-3286-3978  
<http://www.furukawa.co.jp>  
Email:comsales@ho.furukawa.co.jp

**North America**  
OFS Fitel, LLC  
Specialty Photonics Division  
25 Schoolhouse Road  
Somerset, NJ 08873 USA  
Tel: +1-732-748-7402  
Fax: +1-732-748-7436  
<http://www.SpecialtyPhotonics.com>  
E-mail:info@SpecialtyPhotonics.com

**Europe**  
Furukawa Electric Europe Ltd.  
3rd Floor, Newcombe House  
43-45 Notting Hill Gate  
London W11 3FE, UK  
Tel: +44-20-7221-6000  
Fax: +44-20-7313-5310  
<http://www.furukawa-fitel.co.uk>  
E-mail:sales@furukawa-fitel.co.uk

**ASIA**  
Furukawa Electric Hong Kong Ltd.  
Suite 2606, Shell Tower,  
Times Square, 1 Matheson Street,  
Causeway Bay, Hong Kong  
Tel: 852-2512-8938  
Fax: 852-2512-9717  
<http://www.fehk.com.hk/>  
E-mail: guest@fehkc.hk