

DFB TO-CAN with aspherical lens cap



Applications

- Digital transmission up to 2.5Gbps
- Analog transmission

Descriptions

- FOL1xxxYxA4x series is a DFB TO-CAN designed for digital and analog applications.
- The module has a TO-CAN package with an aspherical lens cap, which contains a DFB laser diode and a power monitor photodiode.
- This laser module complies with telecom requirements described in Telcordia™ GR-468 and is manufactured in an ISO™9001 certified production line.

Features

- 1310nm, 1550nm and C-WDM (1470~1610nm) wavelength are available
- Wide temperature operation
- Low threshold current
- High side mode suppression ratio
- RoHS compliant

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit	Note
Storage Temperature	Tstg	-40	85	°C	
Operating Case Temperature	Tc	-20	85	°C	S version
		0	70	°C	B version
LD Forward Current	IfLD	-	150	mA	
LD Reverse Voltage	VrLD	-	2	V	
PD Forward Current	IfPD	-	5	mA	
PD Reverse Voltage	VrPD	-	20	V	
Soldering Temperature (<10s)	Stemp	-	260	°C	
Relative Humidity	RH	0	85	%	

Specifications ($T_c=25^\circ\text{C}$, $P_o=5\text{mW}$, unless otherwise specified)



Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Threshold Current	I _{th}	-	8	15	mA	CW
		-	-	40		13F1 ; CW, T _c =over temperature
		-	-	50		15F5, 1xQx ; CW, T _c =over temperature
LD Operating Current	I _{op}	-	-	40	mA	13F1 ; CW
		-	-	70		13F1 ; CW, T _c =over temperature
		-	-	50	mA	15F5, 1xQx ; CW
		-	-	90		15F5, 1xQx ; CW, T _c =over temperature
Slope Efficiency	η	0.25	0.35	-	W/A	13F1 ; CW
		0.15	-	-		13F1 ; CW, T _c =over temperature
		0.15	0.25	-	W/A	15F5, 1xQx ; CW
		0.10	-	-		15F5, 1xQx ; CW, T _c =over temperature
LD Forward Voltage	V _f	-	-	1.6	V	CW
Peak Wavelength	λ _p	1280	1310	1335	nm	13F1 ; CW, T _c =over temperature
		1530	1550	1570	nm	15F5 ; CW, T _c =over temperature
		λ _p -3	λ _p * ¹	λ _p +3	nm	1xQx ; CW, T _c =25°C
Side Mode Suppression Ratio	SMSR	30	-	-	dB	CW, T _c =over temperature
Rise Time	t _r	-	-	0.10	ns	I _b =I _{th} , 20-80% T _c =over temperature
Fall Time	t _f	-	-	0.15	ns	I _b =I _{th} , 80-20% T _c =over temperature
Monitor PD Current	I _m	50	-	1500	μA	V _{rPD} =5V
Monitor PD Dark Current	I _d	-	-	100	nA	V _{rPD} =5V
Monitor PD Capacitance	C	-	-	10	pF	V _{rPD} =5V, f=1MHz

Note: *1 λ_p: **14Q7**:1470nm, **14Q9**:1490nm, **15Q1**:1510nm, **15Q3**:1530nm, **15Q5**:1550nm, **15Q7**:1570nm, **15Q9**:1590nm, **16Q1**:1610nm, Wavelength tolerance can be customized.

Dimensions and pin assignments

Unit: mm

Tolerance: +/-0.1mm, unless otherwise specified

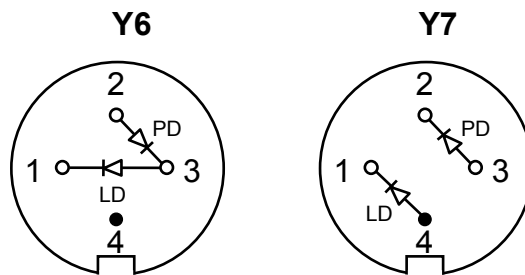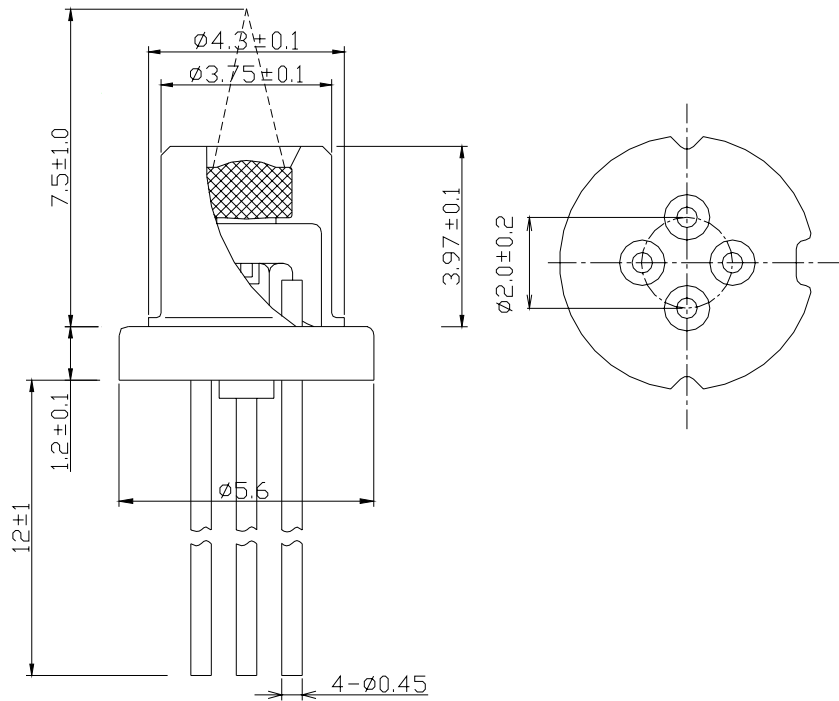

Bottom view, No.4 Pin is Case GND

Ordering information

FOL□□□□Y□A4□

Wavelength	
13F1	1310nm
15F5	1550nm
14Q7	1470nm
14Q9	1490nm
15Q1	1510nm
15Q3	1530nm
15Q5	1550nm
15Q7	1570nm
15Q9	1590nm
16Q1	1610nm

Pin assignment	
6	Y6
7	Y7

Operating case temperature	
S	-20~+85°C
B	0~+70°C

Safety information

This product complies with 21 CFR 1040.10 and 1040.11, Class 3b laser product. Invisible laser radiation is emitted from the end of the fiber or connector. Avoid direct exposure to the beam.



Telcordia is a trademark of Telcordia Technologies, Inc.
 ISO is a trademark of The International Organization for Standardization.
 Hytel is a trademark of DuPont.

Furukawa Electric reserves the right to improve, enhance and modify the features and specifications of FITELE products without prior notifications.

 **FURUKAWA ELECTRIC CO., LTD.**

Japan
Head Office
 2-2-3, Marunouchi
 Chiyoda-ku
 Tokyo 100-8322, JAPAN
 Tel: +81-3-3286-3253
 Fax: +81-3-3286-3978
<http://www.furukawa.co.jp>
 Email:comsales@ho.furukawa.co.jp

North America
OFS Fitel, LLC
Specialty Photonics Division
 25 Schoolhouse Road
 Somerset, NJ 08873 USA
 Tel: +1-732-748-7402
 Fax: +1-732-748-7436
<http://www.SpecialtyPhotonics.com>
 E-mail:info@SpecialtyPhotonics.com

Europe
Furukawa Electric Europe Ltd.
 3rd Floor, Newcombe House
 43-45 Notting Hill Gate
 London W11 3FE, UK
 Tel: +44-20-7221-6000
 Fax: +44-20-7313-5310
<http://www.furukawa-fitel.co.uk>
 E-mail:sales@furukawa-fitel.co.uk

ASIA
Furukawa Electric Hong Kong Ltd.
 Suite 2606, Shell Tower,
 Times Square, 1 Matheson Street,
 Causeway Bay, Hong Kong
 Tel: 852-2512-8938
 Fax: 852-2512-9717
<http://www.fehk.com.hk/>
 E-mail: guest@fehk.cn