



AC3220 Series

Uncooled 2.5 Gbps 1310 nm Fabry Perot Laser in TO Package



Description

The AC3220 series laser is an uncooled semiconductor InAlGaAs Fabry Perot laser working at 1310 nm wavelength. The device is delivered in a hermetic TO package with photodiode for optical power monitoring. This high performance, and high reliability laser is suitable for applications up to 2.5 Gbps in short haul links or local networks.

Features

- 1310 nm typical emission wavelength
- High power over wide temperature range.
- High reliability
- Multi-quantum Well (MQW) active layer

Applications

- Telecommunication
- Data Communication
- Storage area networks
- Access networks

Absolute Maximum Rating

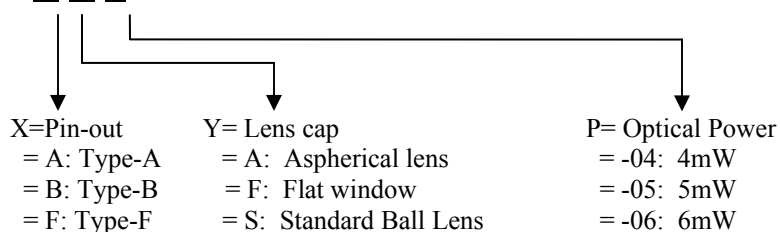
Symbol	Parameter	Ratings	Unit
V_{RL}	Reverse Voltage (Laser diode)	2	V
I_{FL}	Forward current (Laser diode)	100	mA
V_{RD}	Reverse Voltage (Photodiode)	20	V
I_{FD}	Forward current (Photodiode)	2	mA
T_C	Case temperature	-40 ~ +85	°C
T_{stg}	Storage temperature	-40 ~ +100	°C


Electrical/Optical Characteristics $T_c=25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{th}	Threshold current	CW		10	15	mA
P_o	Output Power Option	-04	CW, $I_{FL}=I_{th}+20\text{mA}$	4		mW
		-05	CW, $I_{FL}=I_{th}+20\text{mA}$	5		
		-06	CW, $I_{FL}=I_{th}+20\text{mA}$	6		
V_{op}	Operating voltage	CW, $I_{FL}=I_{th}+20\text{mA}$		1.15	1.5	V
η	Slope efficiency	CW, $I_{FL}=I_{th}+20\text{mA}$	0.3 (0.2)	0.5 (0.35)		mW/mA
λ_c	Center Wavelength	CW, $I_{FL}=I_{th}+20\text{mA}$	1290	1310	1330	nm
$\Delta\lambda$	Spectral width (RMS)	CW, $I_{FL}=I_{th}+20\text{mA}$		1.5	3	nm
$\theta_{//}$	Beam divergence angle (parallel)	CW, $I_{FL}=I_{th}+20\text{mA}$		25 (8)		Deg.
θ_{\perp}	Beam divergence angle (perpendicular)	CW, $I_{FL}=I_{th}+20\text{mA}$		38 (13)		Deg.
T_r, T_f	Rise and fall time	$I_{FL}=I_{th}+20\text{mA}$, 10~90%		100	150	ps
I_{mon}	Monitor current (Photodiode)	CW, $V_{RD}=1\text{V}$	0.1	0.5		mA
I_D	Dark current (Photodiode)	$V_{RD}=10\text{V}$		0.01	0.1	μA
C_t	Capacitance (Photodiode)	$V_{RD}=10\text{V}$, $f=1\text{MHz}$		10	20	pF
F	Focus Length	Aspherical Lens Cap "A"	7.2	7.5	7.8	mm
		Aspherical Lens Cap "K"	5.7	6.0	6.3	mm

Note: () applied to the lens-cap types (-A, and -S)

Ordering Information:

 AC3220-**X**-**Y**-**P**


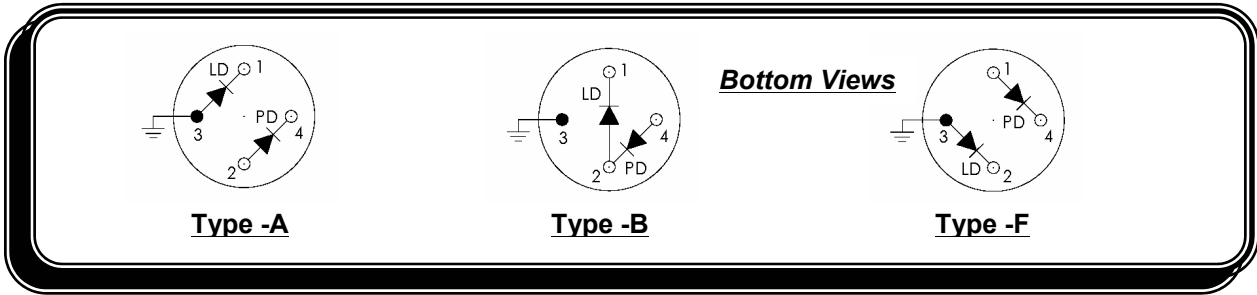
(See options next page)

Example: AC3220-A-A-04 is an Archcom 2.5 Gbps 1310 nm Fabry Perot laser, with Type-A pin-out, Aspherical lens cap, output power of 4 mW.



Archcom Technology, Inc. reserves the right to make changes in design, specifications and other information at any time without prior notice. Information in this data sheet is believed to be reliable. However, no responsibility is assumed for possible inaccuracy or omission.

Pin-out Options



Outline Drawings (in mm)

