


# ML1391

1350 nm unmounted high-power laser bar

## Overview

ML1391 is an unmounted high-power laser bar (laser array) producing up to 15 W CW output power. A member of the RangerLase product family, this multimode device provides efficient and stable laser light output in CW and pulsed operation. Adequate cooling should be ensured during operation.

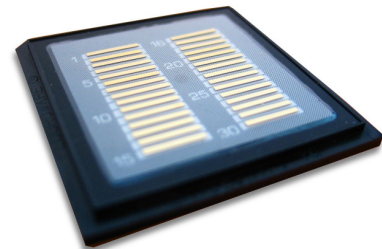

## Applications

### Industrial

Photometry  
Sensing

### Medical

Aesthetic Treatments  
Surgery

## Electro-optical Characteristics

Parameter	Symbol	Typical value	Unit
Peak Wavelength	$\lambda$	1350 ± 20	nm
Optical Output Power	$P_{OPT}$	15	W
Operating Current	$I_{OP}$	70	A
Operating Voltage	$V_{OP}$	1.4	V
Slope Efficiency	$\eta$	0.20	W/A
Threshold Current	$I_{TH}$	18	A
Wavelength - Temp. Coefficient	$\Delta\lambda/\Delta T$	0.5	nm/K
Spectral Width	$\delta\lambda$	7	nm
Parallel Beam Divergence (FWHM)	$\theta_{  }$	11	°
Perpendicular Beam Divergence (FWHM)	$\theta_{\perp}$	37	°

All above values are typical for CW operation @ 20°C.

## Absolute Maximum Ratings


Parameter	Symbol	Rating	Unit
LD Reverse Voltage	$V_{RLD}$	2	V
LD Forward Current	$I_{FLD}$	100	A
Operating Temperature	$T_{OP}$	0...40 <sup>1</sup>	°C
Storage Temperature	$T_{STG}$	-40...85	°C

<sup>1</sup> A non-condensing environment should be ensured over the useful temperature range.

### Mechanical Specification

Parameter	Symbol	Value	Unit
Cavity Length	L	1000	μm
Bar Width	W	10	mm
Emitter Pitch	$P_e$	500	μm
Emitter Width	$W_e$	150	μm
Fill Factor	FF	20	%
Bar Thickness	H	105 ± 15	μm
Emitters in a Bar		19	

### Bar Layout

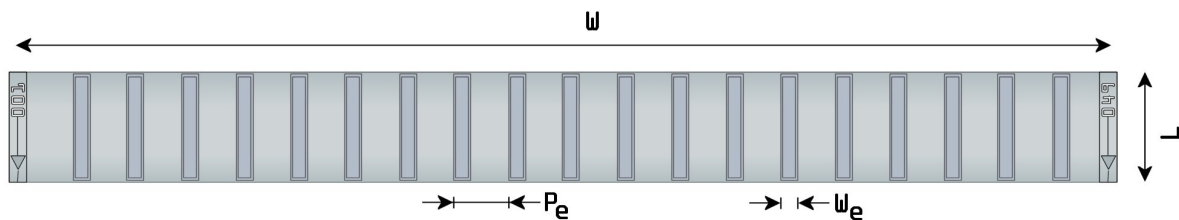

### Safety Information

- The laser light emitted from this laser device is invisible and harmful to the human eye. Avoid eye and skin exposure to the beam, both direct and reflected.
- Products are subject to the risks normally associated with sensitive electronic devices including static discharge, transients, and overload. Please ensure ESD protection prior to handling the products.
- These Modulight products are not intended for use in systems where product malfunction can reasonably be expected to result in personal injury.



Peak power and wavelength are for safety analysis only, not to present device performance.

### Liability note

This document is sole property of Modulight, Inc. No part of this document may be copied without written acceptance of Modulight, Inc. All statements related to the products herein are believed to be reliable and accurate. However, the accuracy is not guaranteed and no responsibility is assumed for any inaccuracies or omissions. Modulight, Inc. reserves the right to make changes in the specifications at any time without prior notice.