


# 690nm, 45mW Wavelength Stabilized Lasers

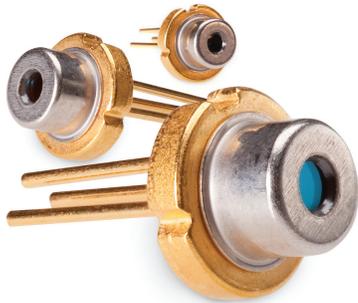

Single Frequency  
Wavelength Stability:  $\sim 0.015\text{nm}/^\circ\text{C}$

Ondax's 690nm Wavelength Stabilized Laser is a single mode, single frequency laser packaged in an ultra-compact, TO-can footprint. The extremely narrow linewidth, broad temperature operating characteristics, and low power consumption deliver affordable, portable instrument-quality performance for a broad range of instrumentation applications.

All SureLock™ Series lasers are stabilized using the Ondax PowerLocker® Volume Holographic Grating (VHG), ensuring precise, ultra-stable center wavelengths, low temperature dependence, and consistent optical performance over the locked region.

## Specifications:

### Specification Summary

Parameter	Symbol	Min	Typ	Max	Unit
Output Power	$P_o$			45	mW
Center Wavelength (vacuum) <sup>1</sup>	$L_p$	688	689	690	nm
	$L_p$	690	691	692	nm
Linewidth (MHz)	$\Delta\lambda$		100		MHz
Central Stabilized Temperature	$T_c$	15		40	$^\circ\text{C}$
Stabilized Temperature Range	$T_r$	10	15		$^\circ\text{C}$

## Features:

- Single frequency performance
- Narrow linewidth  $< 100$  MHz
- Wavelength stability across operating range  $0.015\text{nm}/^\circ\text{C}$
- Coherence length  $> 2\text{m}$
- Compact, hermetically sealed TO footprint

## Applications:

- Raman Spectroscopy
- Metrology
- Bio-instrumentation
- Graphic Arts
- Sensing
- Analytical Instrumentation


### Operating Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Threshold Current (CW)	$I_{th}$		30	60	mA
Operating Current	$I_{op}$		75	120	mA
Operating Voltage	$V_{op}$		2.3	3	V
Laser Reverse Voltage	$V_{rl}$			2	V
Monitoring Output Current	$I_m$	0.08	0.15	0.35	mA
Beam Divergence, Perpendicular	$Q_v$	18	21	25	Degrees
Beam Divergence, Parallel	$Q_h$	7	9	12	Degrees
Emitter Size			2 x 3		$\mu\text{m}$
Differential Efficiency	DE (dP/dI)		1.1		mW/mA
Operating Temperature <sup>2</sup>	$T_{op}$	0		50	$^\circ\text{C}$
Storage Temperature <sup>2</sup>	$T_s$	-10		60	$^\circ\text{C}$
Polarization			100:1		


<sup>1</sup>Please specify wavelength at time of ordering    <sup>2</sup>Non-condensing    All specifications are at rated power with a case temperature of  $25^\circ\text{C}$  unless otherwise noted

## 691nm, 45mW Wavelength Stabilized Lasers


### Stabilized Temperature Range

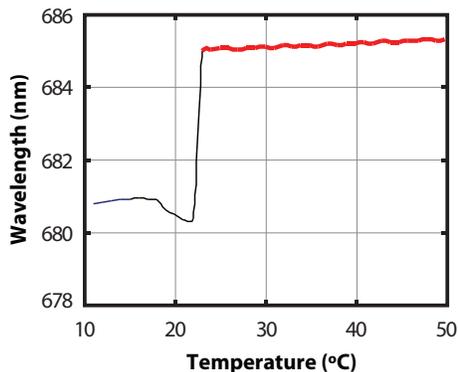


### Output Power vs Forward Current (Typical)

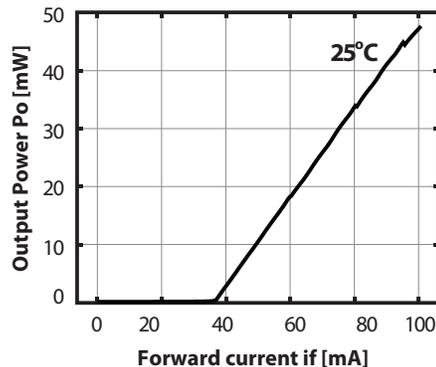

### Side View

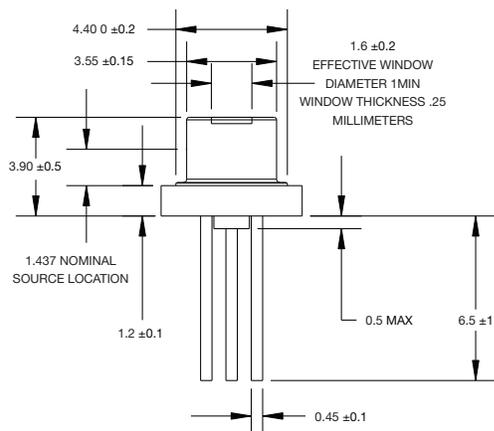


### Bottom View

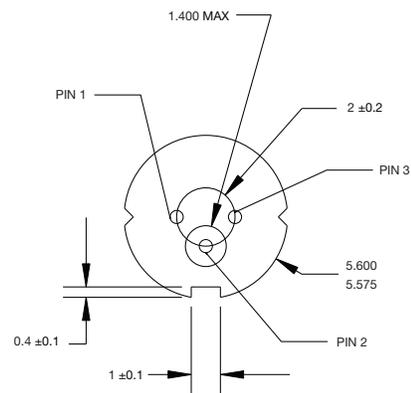

### Pinout

Pin	Description
1	Photodiode Cathode
2	Case
3	Laser Diode Anode



### Model Numbers

T0-689-PLR45

T0-691-PLR45

