

## ADL-78051TL

### AlGaAs Infrared Laser Diode

★780nm 5mW 60 °C Reliable Operation!

#### •Features


1. Low operating current
2. High efficiency
3. Better power budget for optical design

#### •Applications

1. Laser printer light source

#### •Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P <sub>O</sub>	CW	5	mW
Reverse voltage (LD)	V <sub>RL</sub>	-	2	V
Reverse voltage (PD)	V <sub>RD</sub>	-	30	V
Forward current (PD)	I <sub>FD</sub>	-	10	mA
Case temperature	T <sub>C</sub>	-	-10~+60	°C
Storage temperature	T <sub>S</sub>	-	-40~+85	°C

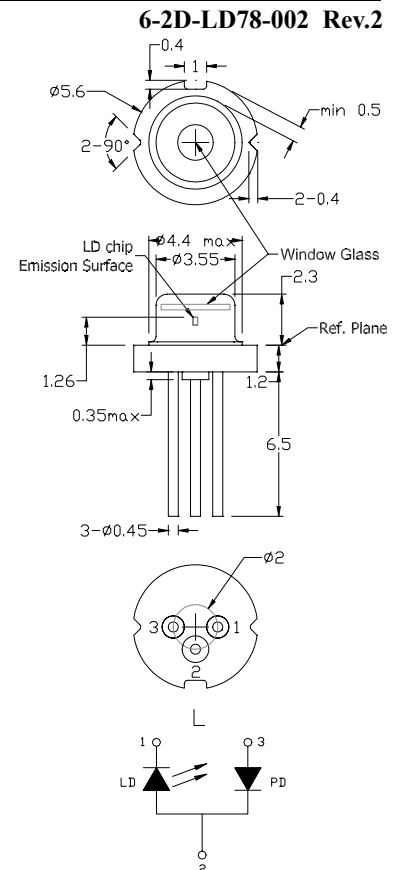

#### •Electrical and optical characteristics (T<sub>c</sub>=25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	$\lambda$	770	785	795	nm	P <sub>o</sub> =5mW
Threshold current	I <sub>th</sub>	10	20	25	mA	
Operating current	I <sub>op</sub>	-	28	40	mA	P <sub>o</sub> =5mW
High temperature operating current	I <sub>op,H</sub>	-	-	60	mA	P <sub>o</sub> =5mW, Case=60°C
Operating voltage	V <sub>op</sub>	-	1.8	2.2	V	P <sub>o</sub> =5mW
Differential efficiency	$\eta$	0.4	0.5	0.7	mW/mA	P <sub>o</sub> =3-5mW
Monitor current	I <sub>m</sub>	0.1	0.35	1.0	mA	P <sub>o</sub> =5mW, V <sub>RD</sub> =5V
Parallel divergence angle	$\theta_{\parallel}$	8	10	12	deg	P <sub>o</sub> =5mW
Perpendicular divergence angle	$\theta_{\perp}$	25	29	32	deg	
Parallel FFP deviation angle	$\Delta\theta_{\parallel}$	-2	-	+2	deg	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-2	-	+3	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	-	+80	$\mu$ m	
Astigmatism	As	-	5	10	$\mu$ m	
Droop	$\Delta^P$	-	5	10	%	

#### •Precautions







- \* Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- \* Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- \* Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- \* Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- \* No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- \* Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

*For reference only. Contents above are subject to change without notice.*

# AlGaAs Infrared Laser Diode

## ADL-78051TL

6-2D-LD78-002 Rev.2

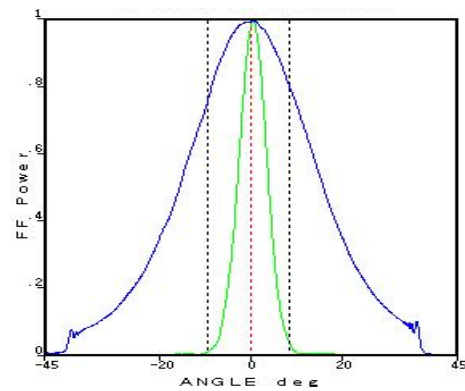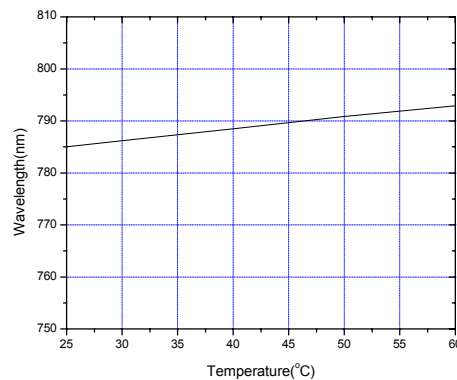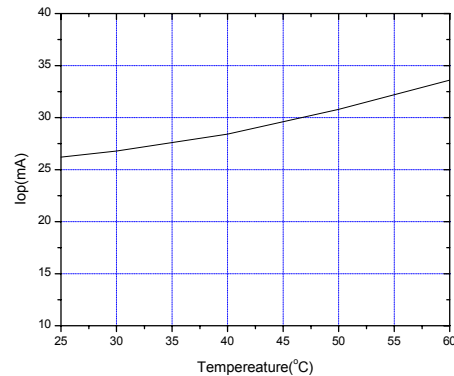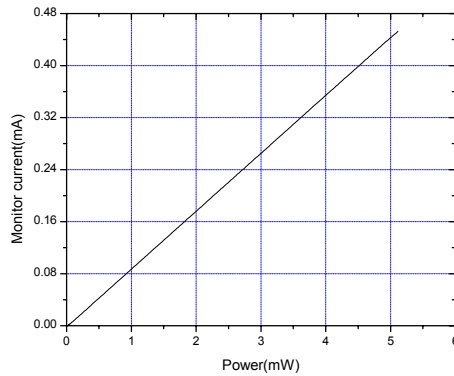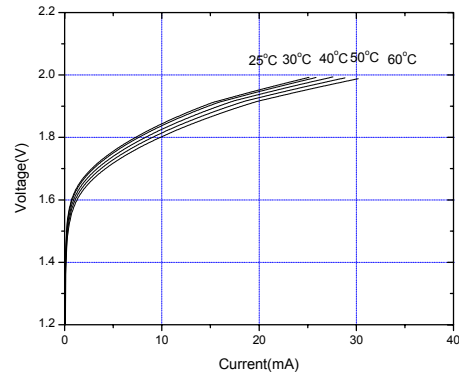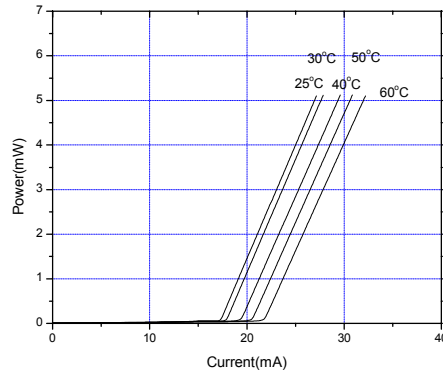

*For reference only. Contents above are subject to change without notice.*

2 Germany & Other Countries  
 Laser Components GmbH  
 Tel: +49 8142 2864 - 0  
 Fax: +49 8142 2864 - 11  
 info@lasercomponents.com  
[www.lasercomponents.com](http://www.lasercomponents.com)

USA  
 Laser Components USA, Inc.  
 Tel: +1 603 821 - 7040  
 Fax: +1 603 821 - 7041  
 info@laser-components.com  
[www.laser-components.com](http://www.laser-components.com)

United Kingdom  
 Laser Components (UK) Ltd.  
 Tel: +44 1245 491 499  
 Fax: +44 1245 491 801  
 info@lasercomponents.co.uk  
[www.lasercomponents.co.uk](http://www.lasercomponents.co.uk)

France  
 Laser Components S.A.S.  
 Tel: +33 1 39 59 52 25  
 Fax: +33 1 39 59 53 50  
 info@lasercomponents.fr  
[www.lasercomponents.fr](http://www.lasercomponents.fr)