



FRPM-660-30

Key Features:

Mini Size
 High Reliability
 High Stability
 High Polarization Extinction Ratio

Applications:



Laser Pointer
 Laser Display
 Test and Measurement Source
 Survey Equipments

Model Number		FRPM-660-30			
Optical Parameters		Specs			Conditions
		Min	Typ	Max	
Wavelength		652nm	660nm	664nm	
Output Power		28mW	30mW ^①	35mW	At 25 °C
Power Stability (2hours @ Constant Temp)		+/-0.5%	+/-1%	+/-2.5%	
Operating Temperature (Case)		-	-	-10~+40 °C	ACC
M-Square		-	-	1.1	
Polarization Extinction Ratio		13dB	15dB	-	At 25 °C
Fiber Coupling Efficiency		40%	50%	55%	
Electrical Parameters					
LD Working Current		-	122 mA ^②	210mA	
LD Working Voltage		-	2.4V	3.0V	
Laser Operating Mode		-	ACC	-	
Fiber Parameters					
Fiber Type		-	4.5/125μm PM Fiber	-	
Fiber Numerical Aperture		-	0.13	-	
Mechanical Parameters					
Laser Head Dimensions	Length	-	28.35mm	-	
	Diameter	-	8mm	-	
Reliability					
Operating Humidity		-	5%~85% R.H.	-	
Storage Temperature		-	-40 to +85 °C	-	
Shock		150m/s ² , 6ms, semisinusoidal, 4000 shocks, z-axis 75m/s ² , 6ms, semisinusoidal, 1000 shocks, x,y-axis			
Vibration		Amplitude = ±0.75mm, 10 Hz to 57 Hz sinusoidal, 20 cycles per axis Acceleration 1g, 57 to 500 Hz sinusoidal, Sweep Rate 1 Oct/min			
Expected Lifetime (MTTF)		10000hrs	-	-	Room temperature

Note: ^① 1~40mW is optional

^② 30mW at 25 °C

Typical Output Performance

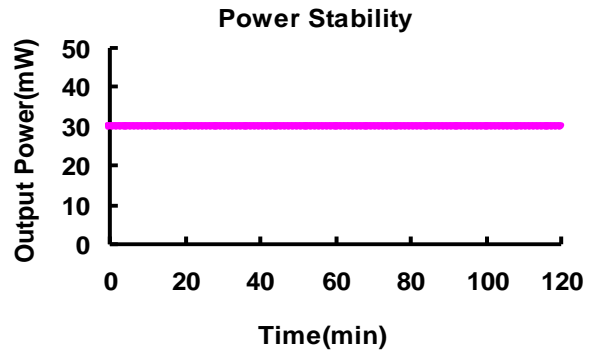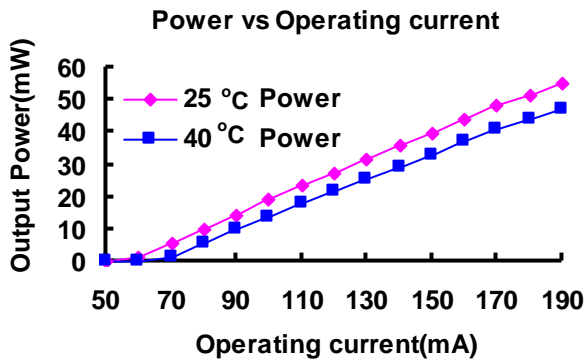

FRPM-660-30-LL-JJ-TT

LL: Fiber Length	05=0.5M
	10=1M
	00= To be Customized
JJ: Fiber Jacket (diameter)	01= 900 μ m buffer
	02=2.8mm PVC Jacket
	00= To be Customized
TT: Fiber Termination	01=No Connector
	02= FC/APC Connector
	03= FC/PC Connector
	00= To be Customized

Dimensions and Pin Configuration (Unit: mm)

