

*This product is sold  
and supported  
in the USA by*




**LASER LAB SOURCE**  
marketplace for **Scientists & Engineers**

**[contact@LaserLabSource.com](mailto:contact@LaserLabSource.com)**

**800.887.5065**

## 808nm 150W High Power Fiber Coupled Diode Laser

---

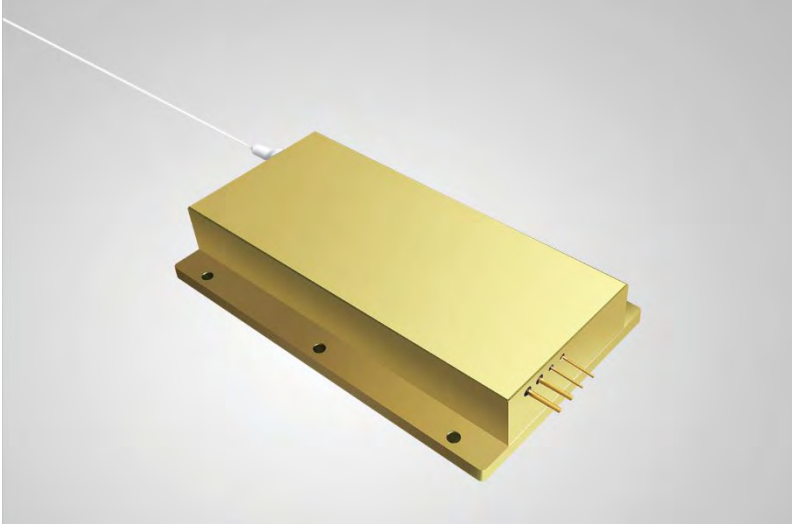

### Features:

- ◆ 808nm wavelength
- ◆ 150W output power
- ◆ 400 $\mu$ m fiber core diameter
- ◆ 0.22 N.A.

### Applications:

- ◆ Solid-state laser pumping
- ◆ Medical use
- ◆ Material processing

These high power diode laser modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staff is constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

## 808nm 150W High Power Fiber Coupled Diode Laser

### K808DA9RN-150.0W

Specifications(25°C)		Symbol	Unit	K808DA9RN-150.0W		
				Minimum	Typical	Maximum
<b>Parameter<sup>(1)</sup></b>	CW Output Power	$P_O$	W	150	-	-
	Threshold current	$I_{th}$	A	-	1.9	-
	Operating current	$I_{op}$	A	-	-	10
	Operating voltage	$V_{op}$	V	-	-	40
	Reverse Voltage	$V_{re}$	V	-	50	-
	Slope Efficiency	$\eta$	W/A	-	20	-
	Electrical-to-Optical Efficiency	PE	%	38	-	-
	Center wavelength	$\lambda_c$	nm	805	-	811
	Spectral width(FWHM)	$\Delta\lambda$	nm	-	5	-
	Back reflection wavelength Range	$\lambda$	nm	1040	-	1200
	Back reflection isolation	-	dB	-	30	-
	Wavelength Shift with Temperature	-	nm/°C	-	0.3	-
	Life Time	MTTF	H	-	10000	-
	<b>Fiber Data<sup>(2)</sup></b>	Buffer diameter	$D_{buf}$	$\mu\text{m}$	-	730
Cladding diameter		$D_{clad}$	$\mu\text{m}$	-	440	-
Core diameter		$D_{core}$	$\mu\text{m}$	-	400	-
Numeric aperture		NA	NA	-	0.22	-
Fiber length <sup>(3)</sup>		$l_c$	m	1.4	1.5	1.6
Connector <sup>(4)</sup>		-	-	-	SMA905	-
Fiber Bend Radius		-	mm	-	140	-
<b>Others</b>	ESD	-	V	-	-	500
	Storage temperature	-	°C	-20	-	70
	Lead Soldering Temp	$T_{is}$	°C	-	-	260
	Lead Soldering Time	$T_{is}$	sec	-	-	10
	Operating case temperature	$T_{op}$	°C	15	-	35
	Relative Humidity	-	%	15	-	75

(1) Data measured under operation output at 150W.


(2) Detachable diode laser is optional.

(3) Other length available upon request.


(4) Other connector available upon request.

### 808nm 150W High Power Fiber Coupled Diode Laser K808DA9RN-150.0W

#### Characteristics

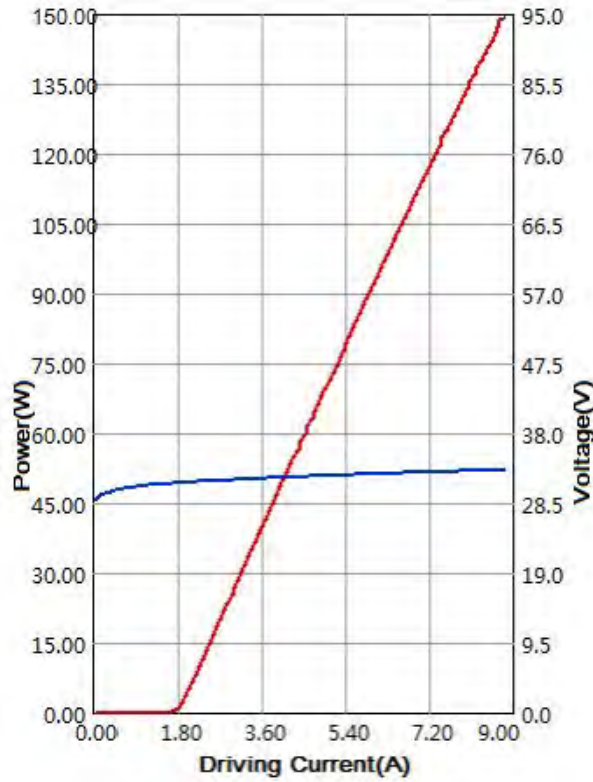


#### Typ. spectrum (T=25°C)

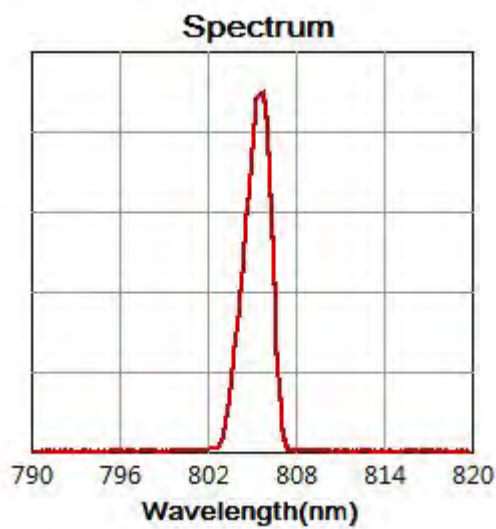

## 808nm 150W High Power Fiber Coupled Diode Laser K808DA9RN-150.0W

### Package Dimensions (mm)

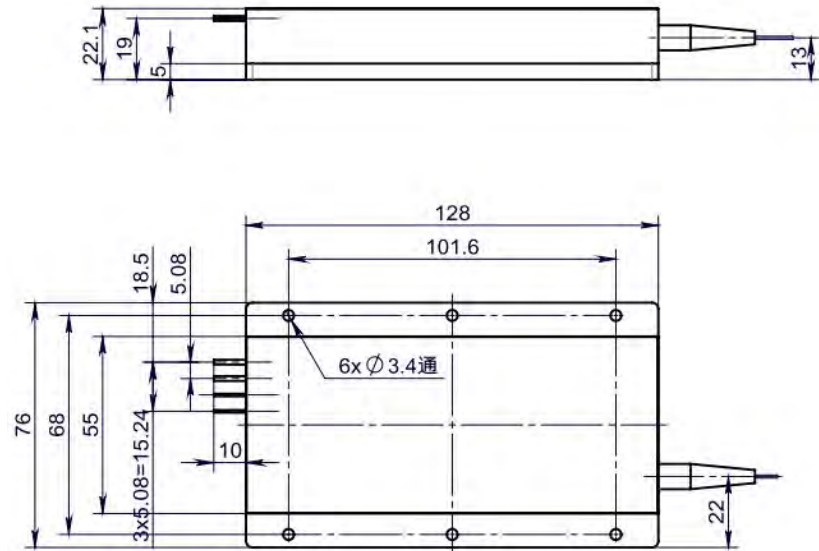

Pins	Function
1	LD (+)
2	LD (-)
3	Thermistor*
4	Thermistor*
5	PD (N) *
6	PD (P) *

\*:Typical function, can be customizable

### OPERATING NOTES

- ◆ Avoid eye exposure to direct or scattered radiation.
- ◆ ESD precautions must be taken.
- ◆ Please connect pins to wires by solder instead of using socket when operation current is higher than 6A.
- ◆ Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- ◆ Use constant current power supply. Avoid surge current.
- ◆ Laser diode must be used according to the specifications.
- ◆ Laser diode must work with good cooling.
- ◆ Operation temperature is 15°C~ 35°C..
- ◆ Storage: -20°C~ +70°C, all pins short-circuit.



**Declaration:** information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.