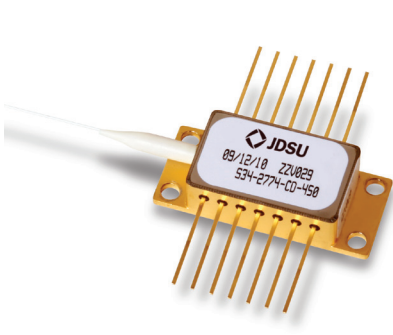


Up to 450mW Fiber Bragg Grating Stabilized 14xx nm Pump Modules

S34 Series

**Key Features**

- Up to 450 mW (1420 to 1465 nm)
- Up to 430 mW (1466 to 1495 nm)
- Up to 320 mW (1496 to 1510 nm)
- Fiber Bragg grating stabilization
- High thermal efficiency
- Integrated thermoelectric cooler, thermistor, and monitor diode
- Robust high-power operation (0 to 70°C)

Applications

- 40 GHz and ultra-long haul systems
- Distributed or discrete Raman amplification

Compliance

- Telcordia GR-468-CORE


The JDSU S34 series 14xx nm, 300/360/400/430/450 mW Diode Laser is wavelength selected at 1420 to 1510 nm using grating-stabilized, polarization-maintaining (PM) fiber. It is housed in an industry-standard, 14-pin butterfly package.

The S34 series lasers are ideal for distributed or discrete Raman amplification applications (1420 to 1510 nm for C- and L-band coverage) and provide up to 450 mW of power and high thermal efficiency to enable longer links and spans, lower bit error rate (BER), and greater wavelength coverage for 40 GHz and ultra-long haul (ULH) systems.

2


Dimensions Diagram

(Note: Specifications in mm unless otherwise noted; tolerance = $x \pm 0.3$, $x.x \pm 0.25$)

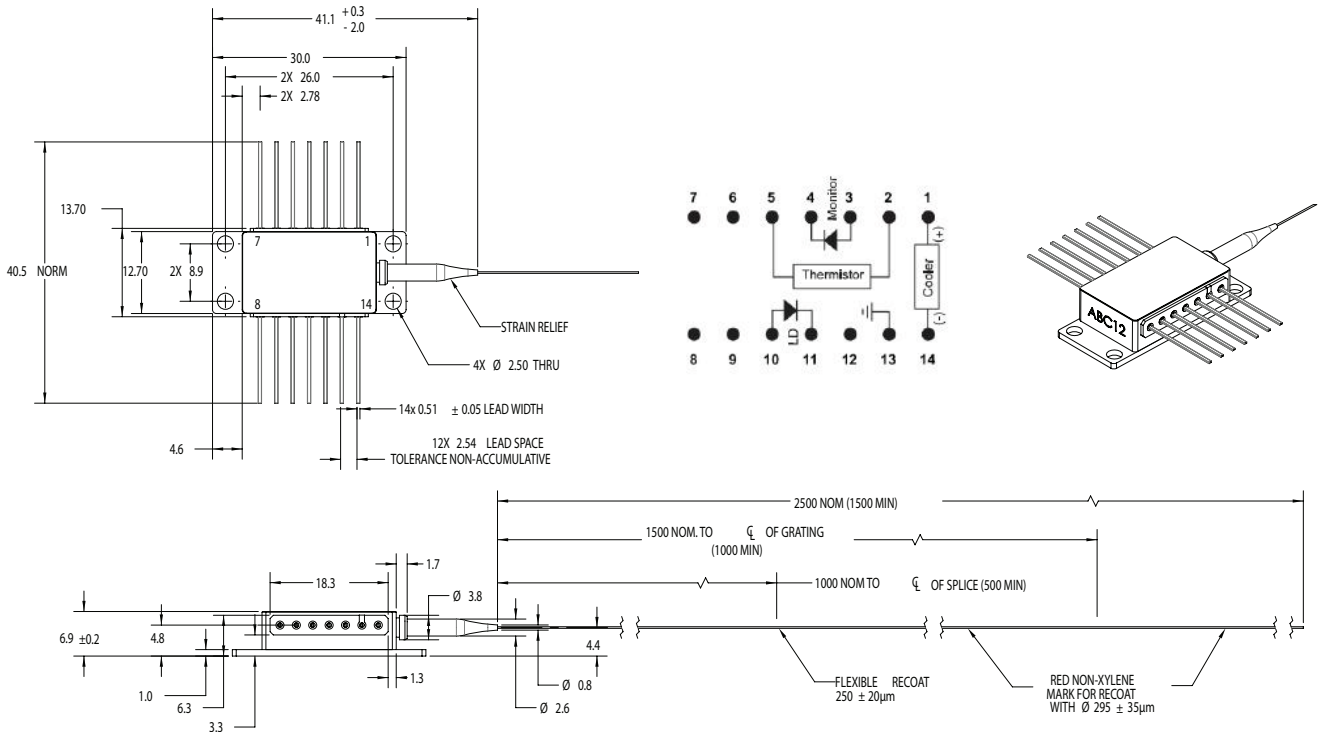

Pinout

Pin	Description
1	Cooler (+)
2	Thermistor
3	Monitor PD anode
4	Monitor PD cathode
5	Thermistor
6	N/C
7	N/C
8	N/C
9	N/C
10	Laser anode
11	Laser cathode
12	N/C
13	Case ground
14	Cooler (-)

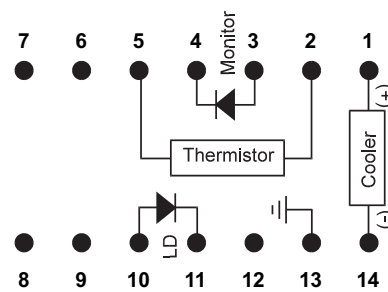

3

Table 1: Absolute Maximum Ratings

Parameter	Symbol	Test Conditions	Minimum	Maximum
Package				
Operating case temperature	T_c		-5°C	70°C
Storage temperature	T_{stg}		-40°C	75°C
Lead soldering temperature		Applied to pins for <10 seconds, Tcase < 75°C	-	300°C
Laser Diode				
Reverse voltage	V_r		-	2 V
Forward current	$I_{f,max}$		-	2000 mA
1420 to 1495 nm			-	1800 mA
1496 to 1510 nm			-	10 μ A
Reverse current			-	500 V
Electrostatic discharge (ESD)	$V_{ESD,LD}$	C = 100 pF, R = 1.5 k Ω , HBM	-	500 V
Monitor Photodiode				
Reverse voltage	$V_{r,PD}$		-	20 V
Forward current	$I_{f,PD}$		-	10 mA
Thermoelectric Cooler				
Current	I_{TEC}		-1.0 A	4.0 A
Voltage	V_{TEC}		-	5.0 V
1420 to 1495 nm			-	4.5 V
1496 to 1510 nm			-	
Thermistor				
Forward current	$I_{f,TH}$		-	5 mA
Fiber Pigtail				
Temperature			-40°C	85°C
Tensile stress			-	5.0 N
Bend radius			16 mm	-

Note: Absolute maximum ratings are the maximum stresses that may be applied to the module for short periods of time without causing damage. Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Exposure to absolute maximum ratings for extended periods of time or exposure to more than one absolute maximum rating simultaneously may adversely affect device reliability. Specifications may not necessarily be met under these conditions.

Table 2: Fiber Pigtail

Parameter	Minimum	Typical	Maximum
Extinction ratio	-	30 dB/100 m	-
Cutoff wavelength	1290 nm	1400 nm	1450 nm
Mode field diameter	9.5 μ m	10 μ m	11.5 μ m
Cladding diameter	122 μ m	125 μ m	128 μ m
UV coating (buffer) diameter	230 μ m	250 μ m	270 μ m
Recoat diameter	260 μ m	295 μ m	330 μ m
Pigtail length	1.5 m	-	2.7 m
Fiber bend radius	25 mm	-	-
Bragg grating distance from package	1.0 m	1.5 m	2.2 m
Splice distance from package	0.3 m	-	-

4

Table 3: Power Consumption^{1,2}

Wavelength (nm)	Power (mW)	Operating Current I _{op} BOL (mA)	Operating Voltage V _{op} BOL (V) / EOL (V)	TEC Current I _{TEC} EOL (A)	TEC Voltage V _{TEC} EOL (V)
S34					
1420–1465	180	870	2.36 / 2.51	2.20	3.00
	200	950	2.40 / 2.56	2.30	3.10
	220	1030	2.44 / 2.61	2.40	3.20
	240	1110	2.48 / 2.66	2.50	3.30
	260	1190	2.52 / 2.70	2.60	3.40
	280	1270	2.56 / 2.75	2.70	3.50
	300	1290	1.94 / 2.23	2.50	2.90
	320	1350	2.00 / 2.30	2.60	3.00
	340	1410	2.06 / 2.37	2.70	3.10
	360	1470	2.08 / 2.39	2.80	3.20
	380	1520	2.14 / 2.46	2.90	3.40
	400	1610	2.18 / 2.51	3.10	3.60
	420	1680	2.22 / 2.55	3.10	3.80
	440	1700	2.24 / 2.58	3.20	3.90
	450	1710	2.26 / 2.60	3.20	4.00
1466–1495	180	870	2.36 / 2.51	2.20	3.00
	200	950	2.40 / 2.56	2.30	3.10
	220	1030	2.44 / 2.61	2.40	3.20
	240	1110	2.48 / 2.66	2.50	3.30
	260	1190	2.52 / 2.70	2.60	3.40
	280	1270	2.56 / 2.75	2.70	3.50
	300	1290	1.94 / 2.23	2.50	2.90
	320	1360	2.00 / 2.30	2.60	3.00
	340	1430	2.06 / 2.37	2.70	3.20
	360	1500	2.08 / 2.39	2.80	3.40
	380	1580	2.14 / 2.46	2.90	3.60
	400	1650	2.18 / 2.51	3.10	3.80
	420	1690	2.22 / 2.55	3.20	4.00
	430	1710	2.26 / 2.60	3.20	4.00
	1496- 1510	180	870	2.36 / 2.51	2.20
200		950	2.40 / 2.56	2.30	3.10
220		1040	2.45 / 2.62	2.50	3.20
240		1140	2.50 / 2.68	2.60	3.30
260		1240	2.55 / 2.75	2.70	3.40
280		1350	2.60 / 2.80	2.80	3.50
300		1400	2.64 / 2.85	3.00	3.80
320		1460	2.68 / 2.90	3.20	4.00

1. I_{op} EOL = 1.15 x I_{op} BOL

2. Values shown are maximum.

5

Table 4: Electro-optical Performance¹

Parameter	Symbol	Test Condition	Minimum	Maximum
Spectrum				
Target wavelength ² (in vacuum)	λ_t	I_{op}	1420 nm	1510 nm (1 nm steps)
Power in band ($\lambda_t \pm 2$ nm)	P_{band}	$I(100 \text{ mW}) \leq I \leq I_{op}$	80%	–
Spectral bandwidth, RMS	$\Delta\lambda_{RMS}$	P_{op} , RMS	–	2.0 nm
Polarization extinction ratio	R_e		16 dB	–
Laser Diode				
Threshold current	I_{th}		–	150 mA BOL
End of lifetime operating current	$I_{op,EOL}$		$1.15 \times I_{op,BOL}$ mA	–
Monitor Photodiode				
Monitor current	I_{MPD}	I_{op} , $V_{rPD}=5 \text{ V}$	0.5 $\mu\text{A}/\text{mW}$	5.0 $\mu\text{A}/\text{mW}$
Monitor dark current	I_d	$V_{rPD}=5 \text{ V}$	–	100 nA
Monitor diode capacitance	C_{MPD}	$V_{rPD}=5 \text{ V}$, 1 kHz	–	20 pF
Front-to-rear tracking ratio	TR			
1420 to 1495 nm		I_m constant, 100 mW to P_{op}	0.85	1.15
1496 to 1510nm		I_m constant, 100 mW to 325 mW	0.92	1.08
Front-to-rear tracking error	TE	I_m constant	–8%	8%
Thermoelectric Cooler Operation				
Power consumption	P_{con}		–	13.5 W EOL
Thermistor resistance	R_{th}		9.5 k Ω	10.5 k Ω
Mean thermistor B constant	B_{avg}	T_C	3700 K	4100 K

1. Laser submount temperature $T_s=25^\circ\text{C}$ unless otherwise stated. Case temperature $T_c=0$ to 70°C unless otherwise stated (maximum $\Delta T=45^\circ\text{C}$). Fiber Bragg grating temperature $T_{fbg}=25^\circ\text{C}$ unless otherwise stated.

2. Customer specified.

Ordering Information

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at customer.service@jdsu.com.

User Safety
Safety and Operating Considerations

The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the fiber when the device is in operation.

CAUTION: THE USE OF OPTICAL INSTRUMENTS WITH THIS PRODUCT INCREASES EYE HAZARD.

Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with this component cannot exceed maximum peak optical power.


CW laser diodes may be damaged by excessive drive current or switching transients. When using power supplies, the laser diode should be connected with the main power on and the output voltage at zero. The current should be increased slowly while monitoring the laser diode output power and the drive current. Careful attention to heatsinking and proper mounting of this device is required to ensure specified performance over its operating life. To maximize thermal transfer to the heatsink, the heatsink mounting surface must be flat to within .001” and the mounting screws must be torqued down to 1.5 in.-lb.

ESD PROTECTION—Electrostatic discharge (ESD) is the primary cause of unexpected laser diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces, and rigorous antistatic techniques when handling laser diodes.

Labeling
21 CFR 1040.10 Compliance

Because of the small size of these devices, the output power and laser emission indicator label shown below is attached to the individual shipping container. All labels are illustrated here to comply with 21 CFR 1040.10 as applicable under the Radiations Control for Health and Safety Act of 1968.

14-Pin Module Label

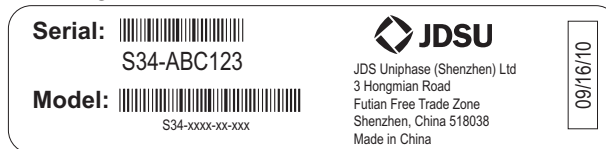Shipping Box Label

Output Power and Laser Emission Indicator Label
