



**40W CW 1064nm VCSEL Array Submodule  
Part # PCW-CS1-40-W1064  
(Preliminary)**

- *Vertical-Cavity Surface-Emitting Laser technology*
- *Very high reliability, can operate at high temperatures (up to 80 °C)*
- *Wavelength stabilized & Narrow spectral width (<1nm)*
- *Easily soldered to heat exchanger*
- *Custom wavelengths available (808-1064nm)*

**Optical & Electrical Characteristics**

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
CW Output Power	55A, 25C Heat-sink	40	43	--	W
Threshold current	25C Heat-sink	--	4	5	A
Operating current	40W, 25C Heat-sink	--	48	55	A
Operating voltage	40W, 25C Heat-sink	--	1.9	2.1	V
Differential resistance	25C Heat-sink	--	15	18	mΩ
Slope efficiency	25C Heat-sink	0.85	0.95	--	W/A
Conversion efficiency	20W, 25C Heat-sink	40	48	--	%
Center wavelength	40W, 25C Heat-sink	1050	1064	1080	nm
Spectral width (FWHM)	40W, 25C Heat-sink	--	0.8	1	nm
Wavelength shift	25C Heat-sink	0.060	0.065	0.070	nm/°C
N.A. (4-sigma)	40W, 25C Heat-sink	--	0.15	0.17	--
Emission area	--	--	4.7x4.7	--	mm <sup>2</sup>

**Maximum Absolute Ratings**

PARAMETER	CONDITIONS
Forward current	280A
Reverse current	25μA
Operating temperature	0 to +80 °C
Storage temperature	-40 to +80 °C

**Ordering information**

PCW - CS1 - 40 - W1064


Package type \_\_\_\_\_ Wavelength (nm)  
 \_\_\_\_\_ CW Output Power (W)

Princeton Optronics, Inc. \* 1 Electronics Drive \* Mercerville, New Jersey 08619

Voice: (609) 584-9696 \* Fax: (609) 584-2448 \* E-mail: sales@princetonoptronics.com \* www.princetonoptronics.com

## Mechanical Characteristics

PARAMETER	VALUE
Package width	8.47 +/-0.1 mm
Package length	12.70 +/-0.1 mm
Package height	0.70 +/-0.1 mm
Thermal resistance	< 0.4 °C/W
Max solder temperature	140 °C
Metalization	Ti/Pt/Au + 12µm Au

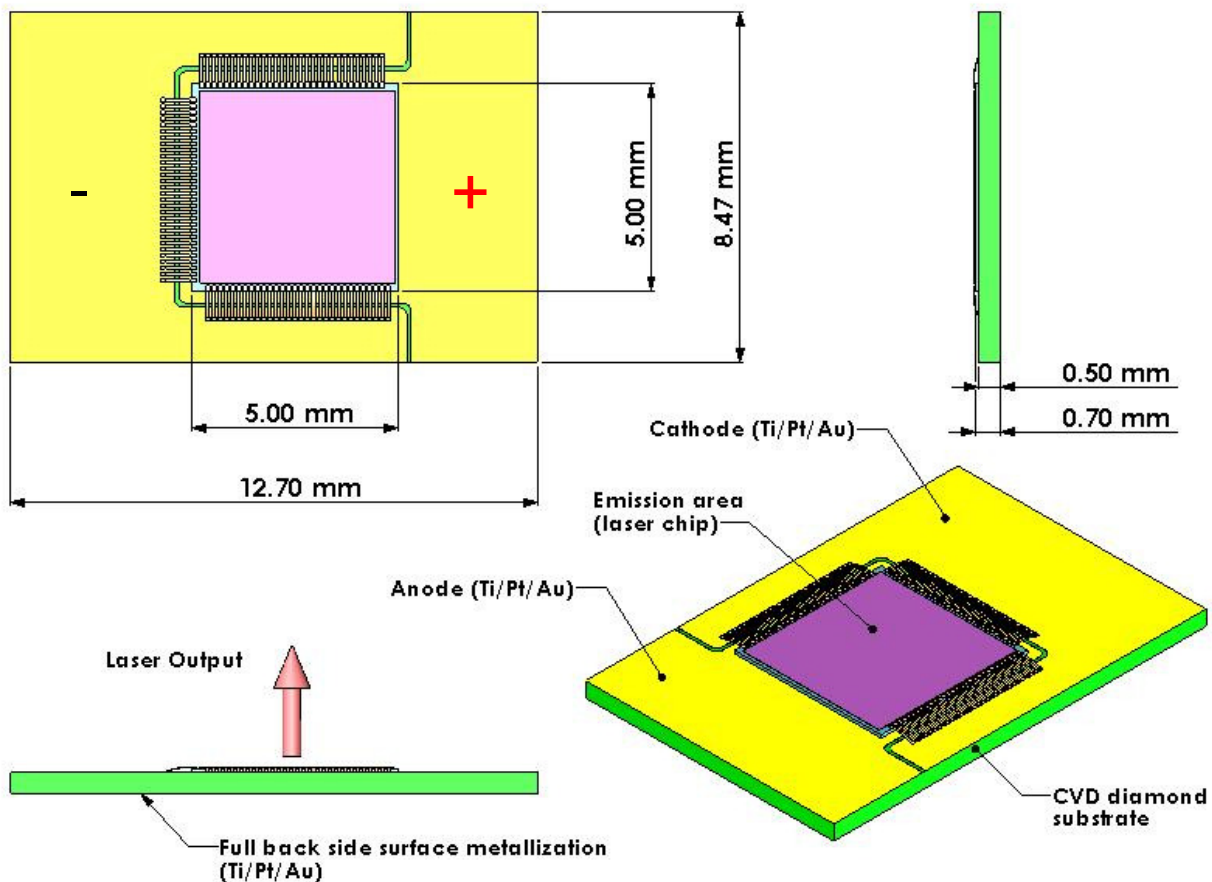


Copyright © 2007 Princeton Optronics, Inc.  
All Rights Reserved.

Princeton Optronics reserves the right to change product design and specifications at any time without notice.

No license is granted by implication or otherwise under any patents or patent right of Princeton Optronics. No responsibility is assumed for the use of these products, nor for any infringement on the rights of others resulting from the use of these products

Laser diode product components are intended for use in a user-devised end system. However, these products are capable of emitting Class IV radiation. Extreme care must be exercised during their operation. Only persons familiar with the appropriate safety precautions should operate a laser product. Directly viewing the laser beam or exposure to specular reflections must be avoided. Serious injury may result if any part of the body is exposed to the beam. The eye is extremely sensitive to the infrared radiation and therefore, proper eye-wear must be worn at all times. Use of optical instruments with these products may increase eye hazard. Always wear eye protection when operating.

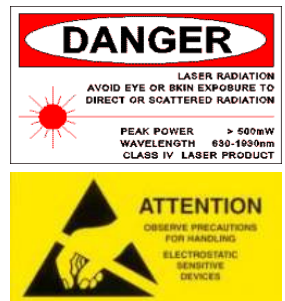

REV. A – 04/07

Princeton Optronics, Inc. \* 1 Electronics Drive \* Mercerville, New Jersey 08619

Voice: (609) 584-9696 \* Fax: (609) 584-2448 \* E-mail: sales@princetonoptronics.com \* www.princetonoptronics.com