



Open Heat Sink Diode Lasers

cw, actively cooled



JOLD-80-CANN-1L

Design 210470024

Features:

- High optical output power of 80 W cw
- High efficiency, low divergences
- Lifetime > 10,000 h, high reliability

Applications:

- Pumping of solid-state lasers


Open Heat Sink Diode Lasers

cw, actively cooled

Specifications (Start of Life)

Product	JOLD-80-CANN-1L, Design 210470024			
Operation Mode	cw, power modulation only between threshold and maximum current			
Maximum Optical Output Power	80	80	80	W
Center Wavelength at 25 °C	807	938	976	nm
Center Wavelength Variation at 25 °C	3	3	3	nm
Typical Spectral Bandwidth (FWHM)	3	3	3	nm
Maximum Spectral Bandwidth (FWHM)	4	4	4	nm
Typical Operation Current	85	87	87	A
Maximum Operation Current	95	97	97	A
Typical Threshold Current	19	15	15	A
Maximum Threshold Current	22	18	18	A
Typical Slope	1.25	1.15	1.15	W/A
Minimum Slope	1.05	0.95	0.95	W/A
Maximum Operating Voltage	2.0	1.8	1.7	V
Typical Fast Axis Divergence FWHM	37	27	27	°
Typical Fast Axis Divergence 86 %	48	34	34	°
Typical Fast Axis Divergence 95 %	63	46	46	°
Typical Slow Axis Divergence FWHM	6	6	6	°
Typical Slow Axis Divergence 86 %	6	6	6	°
Typical Slow Axis Divergence 95 %	7	7	7	°
Anode, Cathode Connectors	Holes for screws M3x4 (max. tightening torque 1 Nm)			
Operation Conditions	Cleanroom class 100, non-condensing atmosphere			
Expected Lifetime	> 10,000 h (constant current)			
Cooling:				
Flow Rate	0.33 l/min			
Flow Rate Tolerance	± 10 %			
Water Temperature	15 ... 35 °C			
Maximum Inlet Pressure	400 kPa			
Pressure Drop	< 200 kPa			
Water Quality	Deionized 2 ... 6 µS/cm, mixed bed ion exchanger, particle filter < 25 µm (not included)			
See Safety and General User Information!				

Options on request: For additional designs or specifications please visit our website: www.jenoptik.com

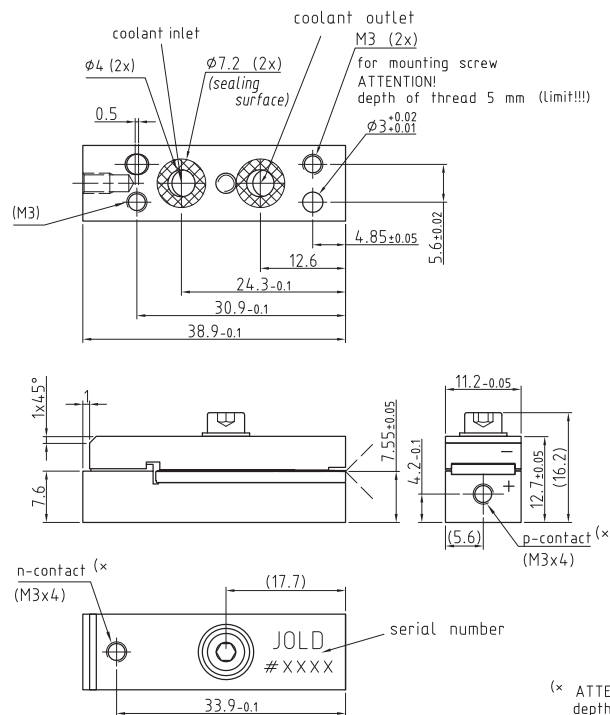

(× ATTENTION!
depth of thread 4 mm (Limit!!!))



JENOPTIK | Lasers & Material Processing

JENOPTIK Laser GmbH

Goeschwitzer Strasse 29 | 07745 Jena | Germany

Phone: +49 3641 65-3053 | Fax: +49 3641 65-4011

E-mail: sales-laser.lm@jenoptik.com | www.jenoptik.com/diodelasers