


766nm, Water-Cooled, Vertical Diode Laser Stack

Features

- Uniform divergence
- Low thermal resistance CW operation
- Customized geometries and housings available
- Optional standard coatings or customized low AR coatings are available
- Optional FAC/SAC are available
- Optional Volume Bragg Grating are available (to ensure that very little pump energy is wasted)

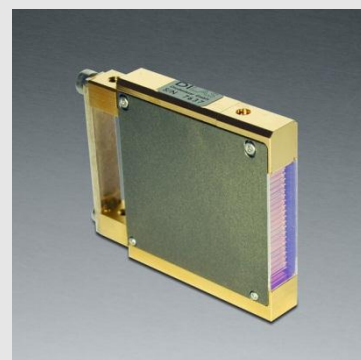

Device Specification

Optical Parameters ¹	Units	
Center Wavelength Range ³	nm	766
Center Wavelength Tolerance ³	nm	±3
Output Power per Bar ²	W	40
Number of Bars ³	#	20
Bar-to-Bar Spacing ³	mm	Approx. 1.8
Spectral Width (FWHM) ⁶	nm	<5
Slope Efficiency per Bar	W/A	>1.17
Fast-Axis Divergence ⁴ (90%)	degrees	<60
Slow-Axis Divergence (95%)	degrees	<8

Electrical Parameters ¹		
Power Conversion Efficiency	%	>52
Threshold Current (I_{TH})	A	<12
Operating Current (I_{OP})	A	≤40
Operating Voltage per Bar (V_{OP})	V	<1.9

Thermal Parameters		
Operating Temperature Range ^{3, 5}	°C	+20 to 30
Storage Temperature Range ⁵	°C	0 to 55

Please refer to DILAS water specification for cooling requirements.

¹Data at 25°C water temperature, unless otherwise stated.

²Reduced lifetime if used above nominal operating conditions.

³Others available upon request.


⁴For fast-axis collimation using FAC lens: divergence <8mrad.

⁵A non-condensing environment is required for storage and operation below the ambient dew point.

⁶With volume Bragg gratings, spectral line narrowing will result in ≤1nm FWHM per bar.

766nm, Water-Cooled, Vertical Diode Laser Stack

Package Dimension

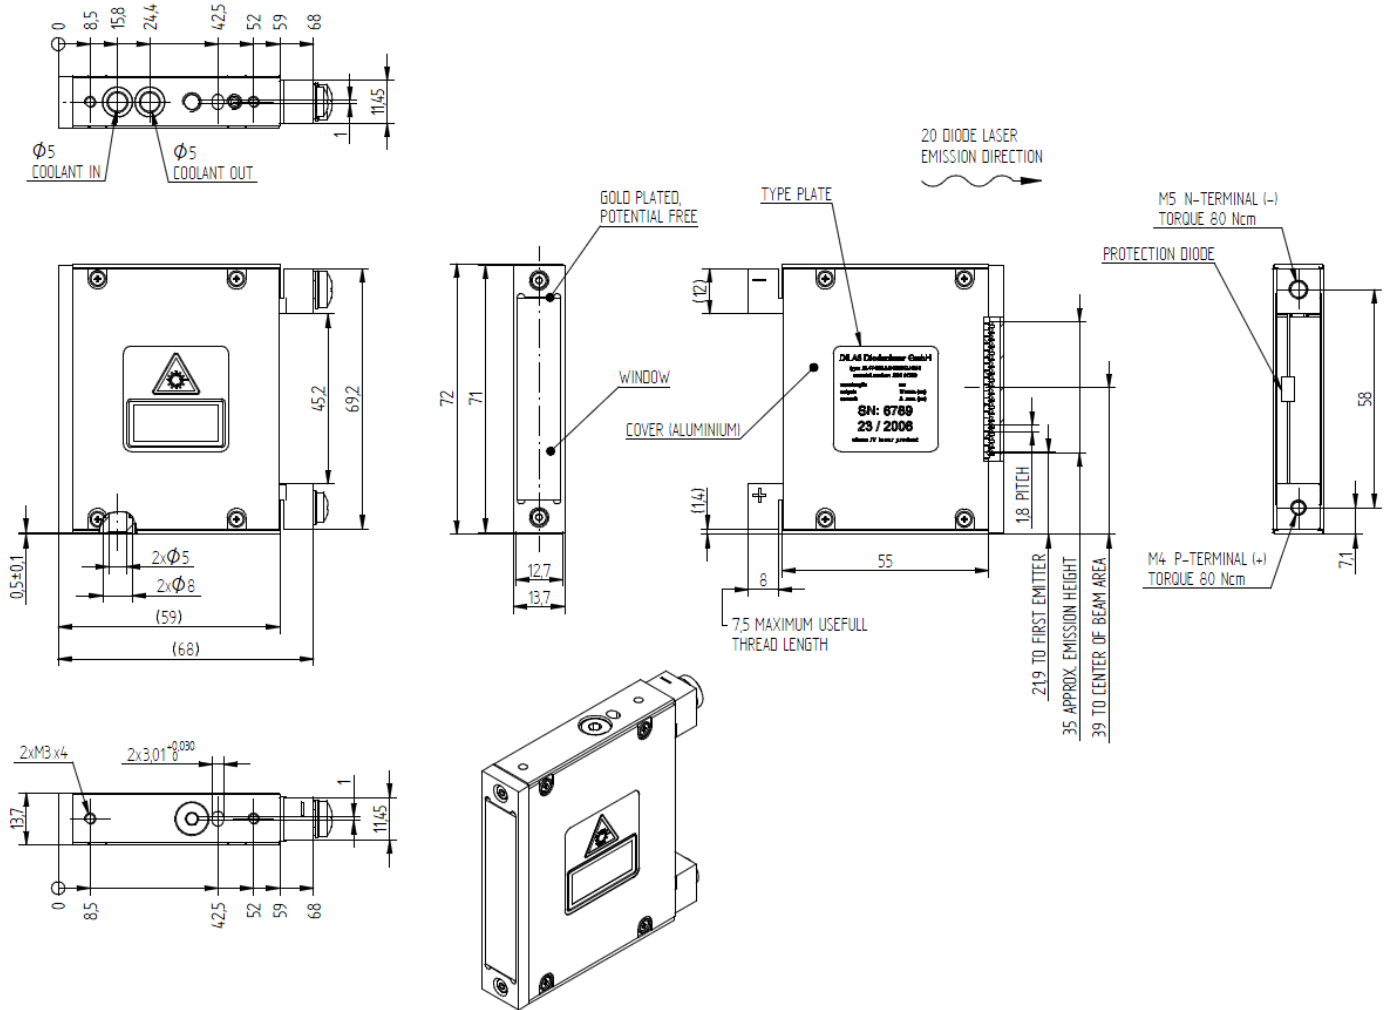

©2013 DILAS. All rights reserved. DILAS reserves the right to change products specifications without notice. For handling precautions, please reference the general handling instruction manual.

For complete details, please contact your local DILAS sales representative or visit our website at www.DILAS.com.

Europe
DILAS Diodenlaser GmbH
Galileo-Galilei-Straße 10
55129 Mainz
Germany
Phone: +49 (0)6131 9226 0
Fax: +49 (0)6131 9226 257
Email: sales@DILAS.de

North America
DILAS Diode Laser, Inc.
9070 South Rita Road
Suite 1500
Tucson, AZ 85747
Phone: +1 (520) 232-3480
Fax: +1 (520) 232-3499
Email: sales@DILAS-INC.com

China & Taiwan
DILAS Diodenlaser GmbH
China Sales Office
Room 206, Sunplus Technology, Bldg. 2
No. 1077 Zu Chongzhi Road
Hi-Tech Park, Shanghai 201203,
P.R. China
Phone: +86 (0) 21-6855-2216
Fax: +86 (0) 21-5027-3793
Email: sales@dilas-china.com.cn