

Onyx MCCP 9000-975



9000 Series 975 nm Diode Laser Bars

Features


- 975 nm \pm 10 nm
- 40 Watts or 60 Watts
- CW, QCW, or ON-OFF (“Hard Pulsed”) operation
- Stackable using Coherent 9013 platforms
- 2.1 mm vertical pitch
- Fast and slow axis collimation options available
- Water-cooled



Mechanical Specifications

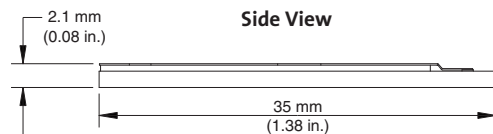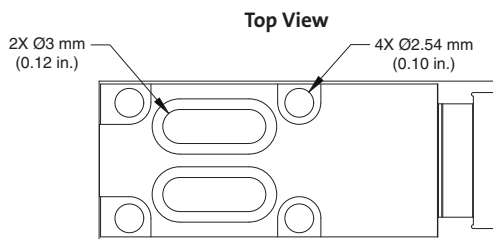

Front View

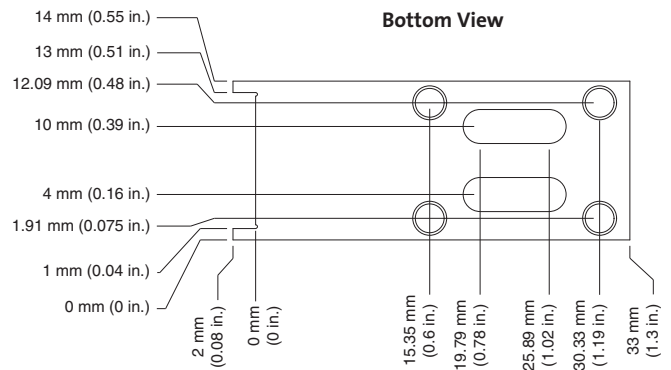

Superior Reliability & Performance

Onyx™ MCCP 9000-975

9000 Series 975 nm Diode Laser Bars

Device Specifications

	40 Watts	60 Watts
Center Wavelength ¹ (nm)	975	975
Center Wavelength Tolerance (nm)	±10	±10
Bar Spectral Width (FWHM)(nm)	<5	<5
Coolant Temperature ² (°C)	20	20
Bar Pitch (mm)	2.1	2.1
Divergence FWHM (no lenses)		
Slow Axis (typical)(deg.)	6	6
Fast Axis (typical)(deg.)	35	35
Divergence FWHM (with fast lens)		
Slow Axis (typical)(deg.)	6	6
Fast Axis (deg.)	<0.25	<0.25
Divergence FWHM (with fast and slow lens) (19 emitters only)		
Slow Axis (deg.)	<4.5	
Fast Axis (deg.)	<0.25	
Thermal Resistance (°C/W)	0.3	0.3
Maximum Coolant Pressure (psi)	65	65
Typical Coolant Pressure (psi)	35	35
Coolant Flow Rate Per Bar (l/min.)	>0.3	>0.3
Maximum Operating Current (A)	45	65
Threshold Current (typical)(A)	8	12
Operating Voltage (V)	<1.9	<1.9
Conversion Efficiency (%)	>50	>50
Series Resistance (Ω)	0.005	0.005
Emitter Dimensions (W x H)	150 X 1	200 X 1
Emitter Spacing (center to center)(μm)	500	400
Number of Emitters	19	25
Polarization	TE	TE
Slope Efficiency (typical)	1.1	1.1
Storage Temperature (°C)	5 to 40	5 to 40

¹ Additional wavelengths are available; please contact Coherent.

² The following water conditions must be met: Operation at temperatures below the dew point requires the use of Class D breathing air environment; deionized water is required; conductivity should be maintained at 2 to 4 microsiemens or 250K ohms to 500K ohms; the pH should be maintained at a range from 7.0 to 7.5; water filter should be rated <30 microns.

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice.

Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all Onyx Diode Laser Bars. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative.



www.Coherent.com

Coherent, Inc.
 5100 Patrick Henry Drive
 Santa Clara, CA 95054
 phone (800) 527-3786
 (408) 764-4983
 fax (408) 764-4646
 e-mail tech.sales@Coherent.com

Benelux +31 (30) 280 6060
 China +86 (10) 6280 0209
 France +33 (0)1 6985 5145
 Germany +49 (6071) 9680
 Italy +39 (02) 34 530 214
 Japan +81 (3) 5635 8700
 Korea +82 (2) 460 7900
 UK +44 (1353) 658 833

