

GDL-A004 *



Key Features:

High Reliability
 Compactable size
 Auto Power Control
 Low Power Consumption
 Wide Operating Temperature

Applications:

Laser Display
 Surveying Equipment
 Laser Alignment & Pointing



Model Number		GDL-A004 *			
Optical Parameters		Specs			Conditions
		Min	Typ	Max	
Wavelength		531nm	532nm	533nm	
Output Power		3.5mW	4mW ^①	4.5mW	At 25 °C
Power Stability	2hours @ Constant Temp	-	-	+/-5%	APC
	Over Operating Temp Range	-	-	+/-25%	
Operating Temperature (Case)		10~+40 °C	0~+45 °C	-	APC
Residual IR		-	-	1%	
Beam Diameter		-	-	0.2mm	At output window
Beam Divergence		-	5.6mrad	7.6mrad	Full angle, 1/e ²
Roundness		70%	80%	100%	
M-Square		-	1.1	1.3	
Electrical Parameters					
LD Working Current		-	260mA ^②	400mA	0~45 °C
LD Working Voltage		1.6V	1.9V	2.2V	
Monitor Current		5uA	-	110uA	
GDL Power Consumption		-	0.52W ^③	0.88W	0~45 °C
Mechanical Parameters					
Laser Head Dimensions	Length	22.3mm	22.6mm	22.9mm	
	Diameter	10.4mm	10.5mm	10.6mm	
Beam Alignment Tolerance	Position(Δr)	-	0.3mm	0.5mm	
	Angle	-	7mrad	17.5mrad	
Laser Weight		-	4.4g	-	
Reliability					
Operating Humidity		-	5%~85% R.H.	-	
Storage Temperature		-	-20 to +60 °C	-	
Shock		-	1000g, 1ms, 6 shocks	-	3 axes, 2 shocks/axis
Vibration		-	20~2000Hz, 0.02g ² /Hz	-	3 axes, 1hr/axis
Expected Lifetime (MTTF)		10000hrs	-	-	Room temperature

Note: ^① 0.5~5mW is optional




^② 4mW at 25 °C

③ 4mW at 25 °C

Typical Output Performance

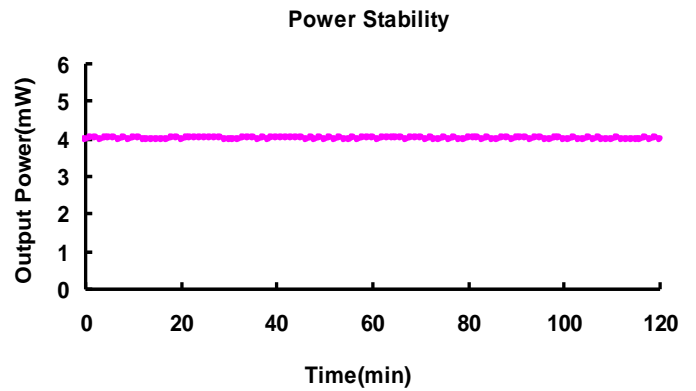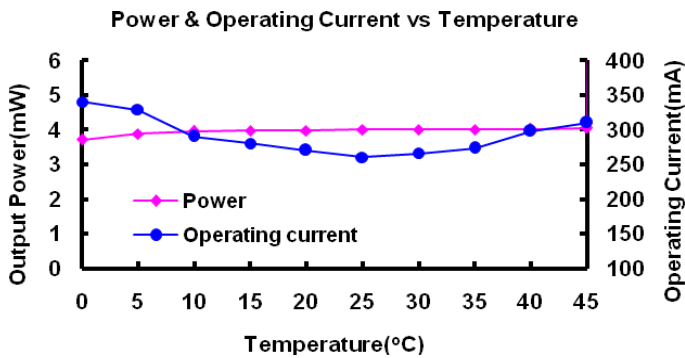

Dimensions and Pin Configuration (Unit: mm)

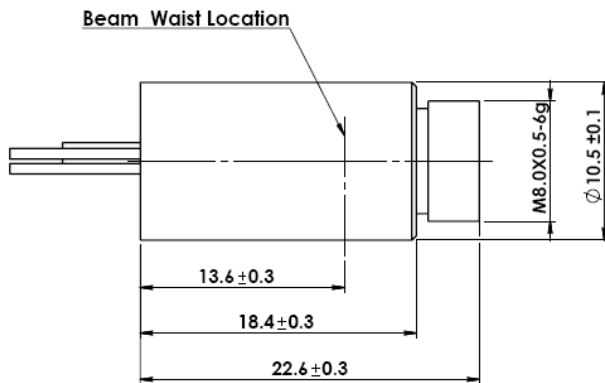

Pin Configurations : 1. LD- 2.None 3.LD+
4.PD+ 5.PD-