

4-pin Fiber Coupled

High Power Multi-Mode SemiNex Lasers
 12xx to 19xx nm
 Custom Wavelengths Available


Applications


- OEM Medical
- DPSS pump source
- LiDAR
- Free Space Communications
- Military / Aerospace

Features

- Cost effective
- High Output Power
- High Dynamic Range
- High Efficiency
- Standard Low Cost Package
- Designed for Volume Applications

SemiNex delivers the highest available power at infrared wavelengths between 12xx and 19xx nm. When necessary we will further optimize the design of our InP laser chips to meet our customers' specific optical and electrical performance needs. Diodes, bars and packages are tested to meet customer and market performance demands. Typical results and packaging options are shown. Contact SemiNex for additional details or to discuss your specific requirements.

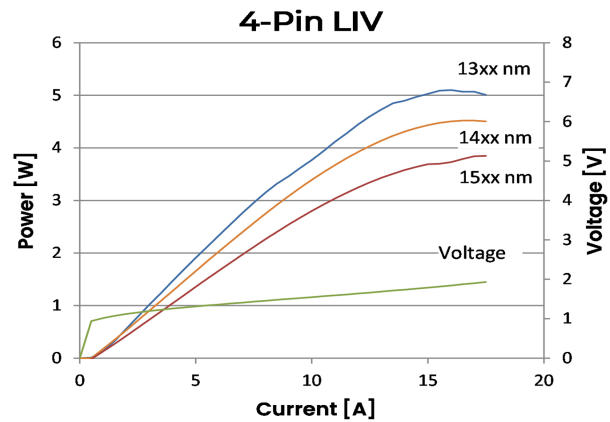

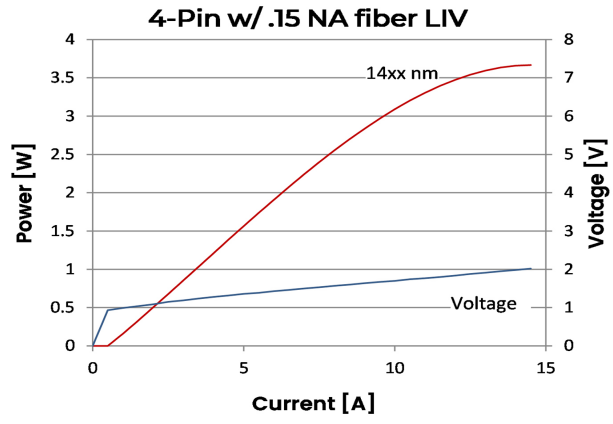



4 Pin Laser Module




	Symbol	4PN-151	4PN-116	4PN-117	4PN-101	4PN-127	4PN-104	4PN-108	4PN-109	Units
Optical										
Wavelength	λ_c	1270	1320	1375	1460	1480	1480	1550	1565	nm (± 20)
Output Power (CW)	P_o	3.80	4.50	4.30	4.00	3.40	3.80	3.30	3.30	watts
Spectral Width	$\delta\lambda$	10	10	10	10	10	10	10	10	nm 3dB
Slope Efficiency	η_s	0.3	0.44	0	0	0.3	0.35	0.3	0.3	W/A
Optical Fiber Core Dia.	η_c	105	105	105	105	105	105	105	105	μ m
Optical Fiber NA		0.22	0.22	0.22	0.22	0.15	0.22	0.22	0.22	
Electrical										
Power Conversion Eff.	η	15.00	20.00	22.00	21.00	16.00	19.00	16.00	16.00	%
Threshold Current	I_{th}	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	A
Operating Current	I_{op}	12	13	12	12	12	12	12	12	A
Operating Voltage	V_{op}	1.7	1.7	1.6	1.6	1.7	1.7	1.7	1.7	V
Series Resistance	R_s	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	ohm
Lead Soldering Temp.	$^{\circ}$ C	250	250	250	250	250	250	250	250	$^{\circ}$ C
Mechanical										
Weight		25	25	25	25	25	25	25	25	g
Operating Temp.**		-40 to 60	-40 to 60	-40 to 60	-40 to 60	-40 to 60	-40 to 60	-40 to 60	-40 to 60	$^{\circ}$ C
Storage Temp.		-40 to 80	-40 to 80	-40 to 80	-40 to 80	-40 to 80	-40 to 80	-40 to 80	-40 to 80	$^{\circ}$ C
Fiber Length		1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	meters
Connector		SMA905	SMA905	SMA905	SMA905	SMA905	SMA905	SMA905	SMA905	
		PD Stand.	PD Stand.	PD Stand.	PD Stand.	Thermistor	PD Stand.	PD Stand.	PD Stand.	
Thermistor										
Thermistor Constant	β					3477				β
Thermistor Resistance	R					10000				K ohm

PLEASE NOTE: The 4 Pin laser package is not electrically isolated. The package body is the anode connection. Care should be taken in mounting and installation.


Specified values are rated at a constant heat sink temperature of 20°C.

**Specified operating conditions are based on 20C heat sink temperature. High temperature operation will reduce performance and MTTF. Unless otherwise indicated all values are nominal.

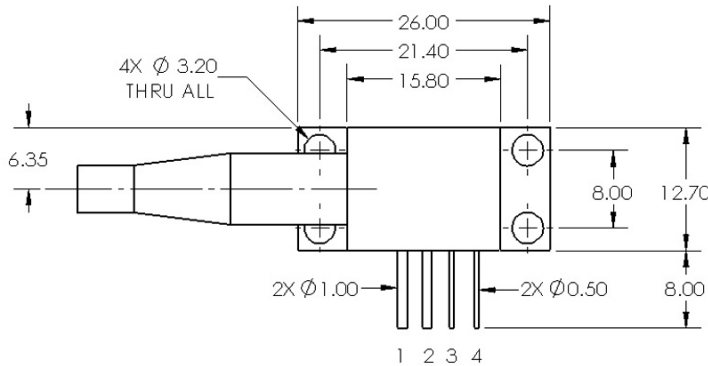

PIN OUT: (FOR REFERENCE ONLY, REFER TO DOCUMENTATION SUBMITTED WITH PRODUCT FOR ACTUAL PIN OUT)

1. LD ANODE (+)
2. LD CATHODE (-)
3. PD (-) or THERMISTOR
4. PD (+) or THERMISTOR

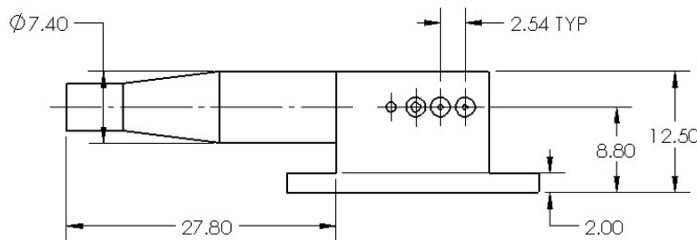

All statements, technical information and recommendations related to the product herein are based upon information believed to be reliable or accurate. The accuracy or completeness herein is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SemiNex Corporation reserves the right to change at any time without notice the design, specification, deduction, fit or form of its described herein, including withdrawal at any time of a product offered for sale herein. Users are encouraged to visit www.seminex.com for the latest data. SemiNex Corporation makes no representations that the products herein are free from any intellectual property claims of others. Please contact SemiNex for more information. 1/2 2016 SemiNex Corporation

SemiNex Corporation • 100 Corporate Place • Peabody, MA 01960 • 978-326-7700 • Email: info@seminex.com • www.seminex.com

Date Created: Oct 4 2020 9:38PM UTC

